


ICOM

VHF/UHF DIGITAL TRANSCEIVER

ID-52A PLUS

Unleash the Excitement


Enjoy D-STAR More Than Ever

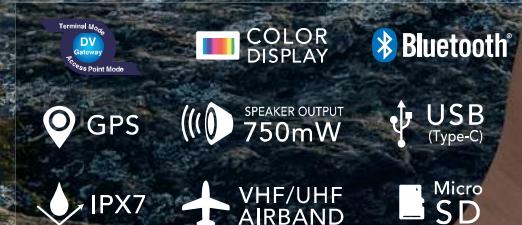

Multifunctional Digital with

Worldwide D-STAR Communication


The ID-52A PLUS is a VHF/UHF dual bander supporting conventional FM communications as well as D-STAR simplex, repeater, regional, and worldwide calls over the Internet connected D-STAR network. With the ID-52A PLUS, you can call a friend in another city, or even internationally through D-STAR repeaters, with digital clear audio.

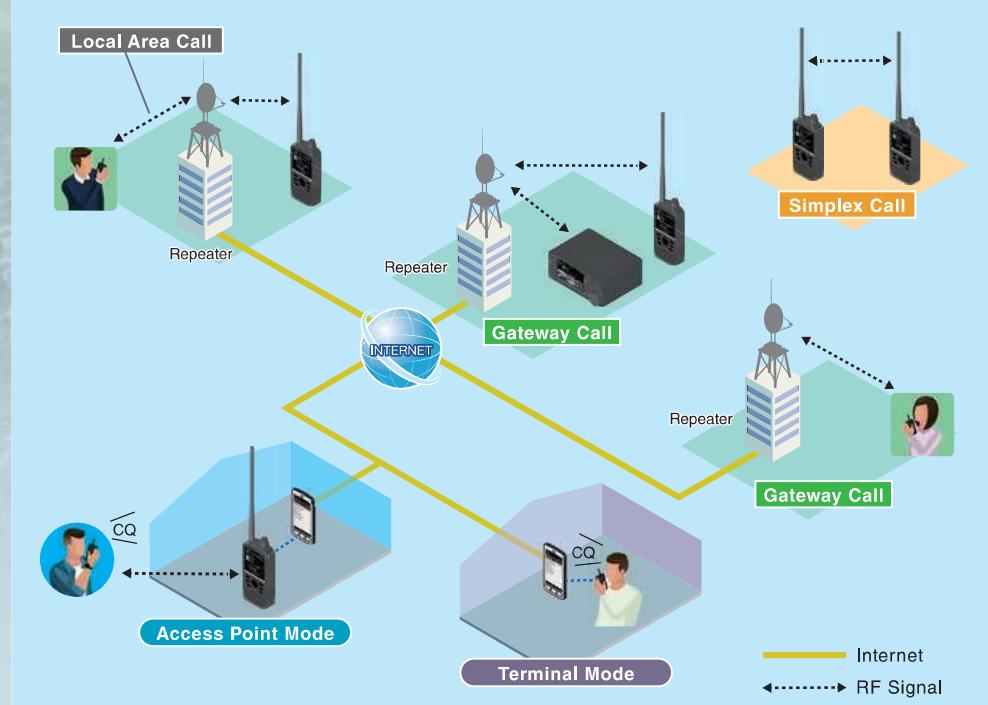

VHF/UHF DIGITAL TRANSCEIVER

ID-52A PLUS

DR (D-STAR Repeater) Function



DR screen

The DR function makes D-STAR and FM repeater communication simple. Combined with the GPS function, you can make selection of a local repeater based on your location. Additionally, the DR mode supports reflector linking controls.

Share Picture Function



You can share pictures with other users and see received pictures on the color display (DV mode). Pictures taken on a smart device can be wirelessly transferred to the ID-52A PLUS through Bluetooth® connection.

* The Share Picture function requires the optional picture utility software ST-4001A (on Google Play™), ST-4001I (on App Store) or ST-4001W (Download from Icom website) picture utility software. The ST-4001W requires a microSD card or a USB cable to transfer pictures.

Bluetooth® Connection with an Android™ Device for Terminal and AP Mode

The ID-52A PLUS can now connect wirelessly to an Android™ device over Bluetooth® connection in the Terminal mode and Access Point mode. By connecting to an Android device with the RS-MS3A app, D-STAR communication is possible through a cellular phone. You can smoothly start Terminal mode and Access Point mode operation wirelessly even when you are going out. You can also operate these modes by connecting your ID-52A PLUS to a PC by a USB cable connected to the internet. When you are areas with no D-STAR repeaters, create your own D-STAR Access Point to access the D-STAR network virtually anywhere.

* The RS-MS3W optional software (Download from Icom website) is required to be installed in the PC. The RS-MS3A optional application software is required to be installed in the Android™ device (Download on Google Play™). Use the Bluetooth® function or a USB cable to connect to the Android™ device. Type-A to Type-C: OPC-2480 (supplied with the transceiver), Type-C to Type-C: User supplied. Terminal and Access Point modes are compatible with the Icom RS-RP3 Gateway Software. If your D-STAR repeater is running G1 or G2 software, ask the repeater administrator to contact the local Icom Distributor to upgrade the software. You need an Internet connection with an IPv4 Global IP address. If you use a cellular phone, you need an IPv4 Global IP address assigned to your Android™ device.

DV and FM Dual Mode

Advanced Functions and Operations

2.3" Large Color Display

The ID-52A PLUS is equipped with a color display. The display size is 2.3 inches, 320 x 280 pixels to achieve excellent viewability. The display background color is selectable from black and white.



Black background




White background

Bluetooth® Enabled Features



VS-3, Bluetooth® Headset

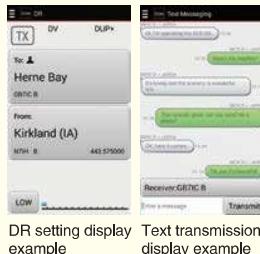

Efficient Operations with Waterfall Display



Waterfall display

The waterfall display shows not only the existence of signals but also the changes of signal level in chronological order. You will have an overview of the band conditions in more detail, including busy frequencies currently used, or open frequencies not used. The band scope mode is selectable from center mode, Fixed mode and Fixed scroll mode.

Chargeable with an USB Type-C™ Cable



The ID-52A PLUS features a USB Type-C™ port which is widely used in the industry, enabling USB charging. Additionally, it is a multifunctional USB port that supports PC programming, reading, and writing content to microSD cards, Terminal/Access Point mode compatibility, and CI-V control.

* A USB adapter is required for charging.
* USB PD is not supported.


V/U, U/U, V/U Dualwatch Including DV/DV Mode

The Dualwatch function monitors the VHF/VHF, UHF/UHF and VHF/UHF bands simultaneously*. You can quickly respond to a call from the Main and Sub bands. Two DV signals can be decoded at the same time. In addition, dual operation of Terminal mode and Simplex/Repeater operations is now possible. While operating in Terminal mode, you can quickly respond by switching to regular RF operations.

* AM/AM mode Dualwatch is not possible. AM signals can be received on only the Main VFO (A band).



DV/DV mode

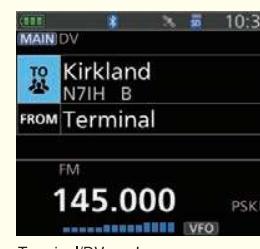

Terminal/DV mode

VHF/UHF Airband and FM Broadcast Receiver

Airband reception is expanded from VHF to UHF Military airband (225 ~ 374.995 MHz). FM broadcast stations can be listened to while using the Dualwatch function.

Integrated GPS Receiver



GPS position with grid locator

D-PRS mode is supported by the internal GPS receiver for sending your location and showing received station location, distance, and direction from your current location. In addition to your location, the ID-52A PLUS displays your current Grid Square information. The GPS position data can be used for Position Auto Reply, Near Repeater Search, and GPS log functions.

microSD Card Slot

You can store QSO Recording, TX Voice Memory, pictures, QSOs and GPS log data. Firmware upgrades, Repeater lists and other personal settings onto a microSD card (up to 32 GB). This can be loaded into the ID-52A PLUS radio.

IPX7 Waterproof and Tough Construction



With Icom's pioneering IPX7 waterproofing and pro-grade construction, the ID-52A PLUS is perfect for your shack or operating in harsh outdoor environments.

Other Features

- 750 mW loud audio output power
- DV fast data mode uses data in place of voice frames
- QSO log in CSV data format
- Accessories for the ID-50A/ID-52A such as battery packs and microphones can be used
- DV/FM near repeater search function
- Voice recorder function
- External DC power jack

■ SPECIFICATIONS

GENERAL				
Frequency coverage (Unit: MHz)	Version	Transmit	Receiver	Broadcast band
USA	144 ~ 148, 430 ~ 450*	(A) 108 ~ 174, 225 ~ 479* (B) 137 ~ 174, 375 ~ 479*	88.0 ~ 108.0	
		(A) means A band, (B) means B band. * Guaranteed range: 144 ~ 148, 440 ~ 450 MHz		
Type of emission		F2D, F3E, F7W		
Mode		DV, FM, FM-N, WFM*, AM*, AM-N*		(* WFM, AM and AM-N are Rx only)
Number of memory channels		1000 memory channels, 4 call channels, 50 scan edges, 100 skip channels, 500 broadcast stations, 2500 repeaters, 300 call signs and 300 GPS memories		
Frequency resolution		5, 6.25, 8.33*, 10, 12.5, 15, 20, 25, 30, 50, 100, 125 and 200 kHz		
		* For only 108,000 MHz ~ 136,991 MHz.		
Operating temperature range		-20°C ~ +60°C, -4°F ~ +140°F		
Frequency stability		±2.5 ppm (-20°C ~ +60°C on the basis of 25°C)		
Antenna impedance		50 Ω (SMA)		
Power supply requirement	Battery pack	7.4 V DC (with BP-272), 7.2 V DC (with BP-307)		
	External DC	10 ~ 16 V DC		
Current drain (at 7.4 V DC)	Tx High	Less than 2.5 A		
	Rx AF Max.	Less than 450 mA (DV), Less than 400 mA (FM, FM-N) (Internal SP, 8 Ω)		
Bluetooth®	Profile	Version 5.3, Class 2 HFP, HSP, SPP, GATT (Serial) over LE		
Dimensions (WxHxD) (projections not included)		61.1 x 121.6 x 34.8 mm, 2.4 x 4.8 x 1.4 in (with BP-272)		
Weight (approx.)		330 g, 11.6 oz (with BP-272 & antenna)		
TRANSMITTER				
Modulation system	DV	GMSK reactance modulation,		
	FM, FM-N	FM reactance modulation		
Output power (at 7.4 V DC)		5 W, 2.5 W, 1.0 W, 0.5 W, 0.1 W (High, Mid, Low2, Low1, S-Low)		
Spurious emissions		Less than -60 dBc (High, Mid), Less than -13 dBm (Low2, Low1, S-Low)		
Max. frequency deviation		±5.0/2.5 kHz (FM/FM-N)		
Ext. Mic impedance		2.2 kΩ		
RECEIVER				
Sensitivity	DV	Less than 0.2 μV (at 1% BER)		
	FM, FM-N	Less than 0.18 μV (at 12 dB SINAD)		
Selectivity		More than 50 dB (DV, FM-N), More than 55 dB (FM)		
Spurious rejection		More than 60 dB		
Audio output power	Internal SP	More than 750 mW (8 Ω load)		
	External SP	More than 200 mW (8 Ω load)		
Receiver sensitivity (Except amateur bands).				
	Frequency range (Unit: MHz)	FM/FM-N/WFM (12 dB SINAD)	AM/AM-N (10 dB S/N)	
BC band	88.000~108.000	Less than 1 μV (WFM)	—	
	108.000~136.991	—	Less than 1 μV	
	137.000~142.000	Less than 0.18 μV	Less than 1 μV	
	142.005~148.000	Less than 0.18 μV	—	
	148.005~174.000	Less than 0.32 μV	—	
	225.000~259.995	Less than 0.56 μV	Less than 1.8 μV	
	260.000~354.995	Less than 0.32 μV	Less than 1.8 μV	
	355.000~374.995	Less than 0.5 μV	Less than 1.8 μV	
	375.000~399.995	Less than 0.5 μV	—	
	400.000~479.000	Less than 0.32 μV	—	
A band	137.000~148.000	Less than 0.18 μV	—	
	148.005~174.000	Less than 0.32 μV	—	
	375.000~399.995	Less than 0.5 μV	—	
	400.000~479.000	Less than 0.32 μV	—	
B band				

All stated specifications are subject to change without notice or obligation.

*AM-N mode cannot be received from 225 ~ 374.995 MHz.

Supplied accessories	• Battery pack, BP-272 • USB Type-C™ cable, OPC-2480 • Antenna, FA-S270C • Belt clip, MB-127 • Hand strap
----------------------	--

Supplied accessories may differ depending on the transceiver version.

Icom, Icom Inc. and the Icom logo are registered trademarks of Icom Incorporated (Japan) in Japan, the United States, the United Kingdom, Germany, France, Spain, Russia, Australia, New Zealand, and/or other countries. The Bluetooth® word mark and logos are registered trademark owned by Bluetooth SIG, Inc. and any use of such marks by Icom Inc. is under license. Android and Google Play are registered trademarks or trademarks of Google LLC. IOS is a trademark or a registered trademark of Cisco in the U.S. and other countries and is used under license. App Store is a service mark of Apple Inc. Windows is a trademark of the Microsoft group of companies. All other trademarks are the properties of their respective holders. D-STAR (Digital Smart Technology for Amateur Radio) is a digital radio protocol developed by JARL (Japan Amateur Radio League). Bluetooth® connection has not been tested for all Bluetooth® compatible devices with this product. This does not guarantee that all devices will work with this product.

Icom Inc.

1-1-32, Kamiminami, Hirano-Ku, Osaka 547-0003, Japan Phone: +81 (06) 6793 5302 Fax: +81 (06) 6793 0013

www.icomjapan.comIcom America Inc.
www.icomamerica.comIcom (Europe) GmbH
www.icomeurope.comIcom (Australia) Pty. Ltd.
www.icom.net.au

Your local distributor/dealer:

Icom Canada
www.icomcanada.comIcom Spain S.L.
www.icomspain.comIcom Asia Co., Ltd.
www.icomasia.comIcom Brazil
E-mail: sales@icombrazil.comIcom (UK) Ltd.
www.icomuk.co.ukIcom France s.a.s.
www.icom-france.com