

Compact, Waterproof Digital Business Radio

IDAS™
ICOM DIGITAL ADVANCED SYSTEM

IDAS™ digital conventional

Type-D single-site trunking

Slim, compact and lightweight

IP67 waterproofing and dust-tight protection

***Motion detection, man down and
lone worker functions as standard***

Good audio quality for noisy environments

Long-lasting battery life

Channel announcement function



IP67

**MDC 1200
Compatible**

Limited functions.

GENUINE
Hologram Label Attached



Compact, Slim Dimensions, Waterproof Digital Transceiver

IDAS™ Digital Mode Operation

The IC-F1000D/F2000D can program Type-D single-site trunking and digital conventional modes as well as analog mode per channel. The IDAS digital mode employs 4-level FSK modulation and the NXDN™ common air interface, offering true 6.25kHz spectrum efficiency, higher security and better audio clarity – even at the fringes of the communication range.

The following IDAS features are programmable:

- PTT ID (TX) • Individual/group calls
- Radio check (RX) • Stun/Kill/Revive (RX)
- Remote monitor (RX) • Emergency (TX)
- Call alert (RX) • Digital voice scrambler (15-bit)
- Status Call (Power ON/OFF status and GPS request)
- Voting scan for multi-site conventional operation

- Voting scan for multi-site

Intelligent Emergency Functions

To assist in worker safety, the IC-F1000D/F2000D has three emergency related functions: motion detection, man down and lone worker functions. If one of these functions are activated, the transceiver automatically enters an emergency phase and starts counting down to send an emergency signal. The built-in motion sensor detects its position and states motion and non-motion.

■ **Optional GPS Speaker-Microphone**

With the optional GPS speaker-microphone, HM-171GPW, GPS position data can be attached to a voice or data transmission such as responding to a GPS request status call.

System image diagram



Photo includes optional stubby antenna

THE AND THE DIGITAL TRANSCEIVERS

IC-F1000D IC-F2000D

The IC-F1000D/F2000D: Extensive Optional Accessories

IP67 Waterproof and Dust-tight Protection

While the body is compact, the IC-F1000D/F2000D has rugged construction providing superior protection against water (1m depth for 30 minutes), dust, sand, mud and other objects. The radio is also tested to MIL-STD 810 specifications. It can withstand harsh use.

Slim, Compact and Lightweight

The IC-F1000D/F2000D has a compact 52.2x111.8x30.3mm body and weighs only 260g (with BP-280 battery pack and belt clip). It's easy to carry around anywhere.

Easy to Hear in a Noisy Environment

The large 36mm speaker of the transceiver provides clear 800mW* audio. The built-in BTL amplifier increases the audio output power and delivers loud and intelligible voice to a radio operator working in noisy environments.

* Typical with internal speaker.

Built-in 2-Tone and 5-Tone (Analog mode)

The IC-F1000D/F2000D has built-in 2-Tone, 5-Tone, CTCSS and DTCS signaling capability for analog mode group communication and selective calling. The IC-F1000D/F2000D can be used as an analog transceiver ready for future digital migration.

Long-Lasting Battery Pack

The large capacity waterproof battery pack, BP-280 (2400mAh typ.), provides 18 hours of operating time*. The supplied rapid charger BC-213* charges the BP-280 in 3.5 hours.

* Tx: Rx: Standby=5:5:90. Power save function ON. BC-213 may be not supplied depending on version.


Other Features

- DTMF autodial memories
- MDC 1200 functions: PTT ID, emergency call, radio check (RX) and stun/revive (RX)
- Surveillance function
- Escalating alarm
- VOX capability for hands-free operation
- Channel announcement function
- Red emergency switch on the top panel



Manufacturing & Construction

» Headsets

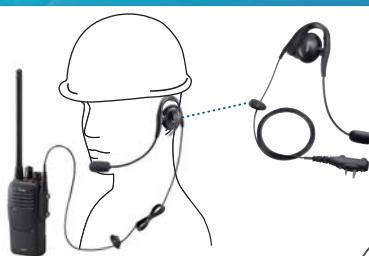

HS-94LWP
Earhook headset with boom microphone provides hands-free operation.



HS-95LWP
Behind-the-head type with boom microphone provides hands-free operation.



HS-97 +VS-4LA or OPC-2004LA

Throat microphone picks up your speech vibration, even in a noisy environment.



Facility & Security Guard

» Speaker-microphones



HM-171GPW

GPS speaker-microphone for sending GPS position data with voice.



HM-168LWP

IP67 waterproof speaker-microphone for outdoor work or places prone to getting wet.



HM-159LA

Full size, durable speaker-microphone provides loud audio.



HM-158LA

Lightweight, compact size speaker-microphone.



Retail & Hospitality

» Earphone-microphones



HM-153LA

Durable lapel microphone with earphone for low-profile, discreet placement.



HM-166LA

Lightweight lapel microphone with earphone.

SPECIFICATIONS

	IC-F1000D	IC-F2000D
GENERAL		
Frequency coverage	136–174MHz	338–380MHz (EXP), 400–470MHz, 450–512MHz (USA), 450–520MHz (AUS)
Number of channels	16 channels	
Type of emission (* Depending on version)	16K0F3E*, 11K0F3E*, 8K50F3E, 4K00F1E/D	16K0F3E*, 11K0F3E, 4K00F1E/D
Channel spacing (* Depending on version)	30*/15*/6.25kHz 25*/12.5/6.25kHz	25*/12.5/6.25kHz
Power supply requirement	7.5V DC nominal	
Current drain (approx.)		
Tx High	1.3A	1.4A
Rx Max. audio/Standby	400mA (Internal SP)/110mA	400mA (Internal SP)/110mA
Antenna impedance	50Ω	
Operating temperature range	–30°C to +60°C; –22°F to +140°F (Radio specifications)	
Dimensions (WxHxD) (Projections not included)	52.2×111.8×30.3 mm; 2.06×4.4×1.19 in (With BP-280)	
Weight (approx.)	260g; 9.17oz (With MB-133 and BP-280)	
TRANSMITTER		
Output power (at 7.5V DC)	5W, 2W, 1W (Hi, L2, L1)	4W, 2W, 1W (Hi, L2, L1)
Max. frequency deviation	± 5.0kHz/± 2.5kHz (Wide/Narrow)	
Frequency stability	± 1.0ppm	
Spurious emissions	70dB min.	
FM Hum and noise	46/40dB typ. (W/N)	50/44dB typ. (W/N)
Audio harmonic distortion	2.0%/1.1% typ. (W/N) (AF 1kHz 40% deviation)	1.0%/1.5% typ. (W/N) (AF 1kHz 40% deviation)
FSK error	5.0% max.	
Ext. microphone connector	3-conductor 2.5 (d) mm (1/10")/2.2kΩ	
RECEIVER		
Sensitivity (at 12dB SINAD) (at 5% BER)	0.21µV typ. –8dBµV emf typ.	0.24µV typ. –8dBµV emf typ.
Adjacent channel selectivity	77/69/59dB typ. (W/N/D)	75/69/58dB typ. (W/N/D)
Spurious response rejection	80dB typ.	
Intermodulation rejection	75/75/71dB typ. (W/N/D)	75/75/70dB typ. (W/N/D)
Hum and noise	47/43dB typ. (W/N)	47/42dB typ. (W/N)
Audio output power		
Internal SP (With 12Ω load)	800mW typ. (at 5% distortion)	
External SP (With 8Ω load)	400mW typ. (at 5% distortion)	
Ext. speaker connector	2-condutor 3.5 (d) mm (1/8")/2.2kΩ	

Measurements made in accordance with TIA-603.

All stated specifications are subject to change without notice or obligation.

* 25kHz bandwidth is no longer available for FCC Part 90 licensees for USA versions.

Applicable U.S. Military Specifications & IP Rating

Standard	MIL 810G	
	Method	Procedure
Low Pressure	500.5	I, II
High Temperature	501.5	I, II
Low Temperature	502.5	I, II
Temperature Shock	503.5	I
Solar Radiation	505.5	I
Rain Blowing/Drip	506.5	I, III
Humidity	507.5	—
Salt Fog	509.5	—
Dust Blowing	510.5	I
Immersion	512.5	I
Vibration	514.6	I
Shock	516.6	I, IV

Also meets equivalent MIL-STD-810-C, -D, -E and -F.

Ingress Protection Standard

Dust & Water | IP67 (Dust-tight and waterproof protection)

Icom, Icom Inc. and Icom logo are registered trademarks of Icom Incorporated (Japan) in Japan, the United States, the United Kingdom, Germany, France, Spain, Russia, Australia, New Zealand and/or other countries. NXDN is a trademark of Icom Incorporated and JVC KENWOOD Corporation. IDAS and IDAS logo are trademarks of Icom Incorporated. All other trademarks are the properties of their respective holders.

Icom Inc. 1-1-32, Kami-minami, Hirano-Ku, Osaka 547-0003, Japan

Phone: +81 (06) 6793 5302 Fax: +81 (06) 6793 0013

www.icom.co.jp/world

Count on us!

Icom America Inc.

12421 Willows Road NE,
Kirkland, WA 98034, U.S.A.
Phone: +1 (425) 454-8155
Fax: +1 (425) 454-1509
E-mail: sales@icomamerica.com
URL: <http://www.icomamerica.com>

Icom Canada

Glenwood Centre #150-6165
Highway 17A, Delta, B.C.,
V4K 5B8, Canada
Phone: +1 (604) 952-4266
Fax: +1 (604) 952-0090
E-mail: info@icomcanada.com
URL: <http://www.icomcanada.com>

Icom Brazil

Rua Itororó, 444 Padre Eustáquio
Belo Horizonte MG,
CEP: 30720-450, Brazil
Phone: +55 (31) 3582 8847
Fax: +55 (31) 3582 8987
E-mail: sales@icombrazil.com

Icom (Europe) GmbH

Communication Equipment
Auf der Krautweide 24
65812 Bad Soden am Taunus, Germany
Phone: +49 (6196) 76685-0
Fax: +49 (6196) 76685-50
E-mail: info@icom-europe.com
URL: <http://www.icom-europe.com>

Icom Spain S.L.

Ctra. Rubí, No. 88 "Edificio Can Castanyer"
Bajos A 08174, Sant Cugat del Valles,
Barcelona, Spain
Phone: +34 (93) 590 26 70
Fax: +34 (93) 589 04 46
E-mail: icom@icomspain.com
URL: <http://www.icomspain.com>

Icom (UK) Ltd.

Blacksole House, Altira Park,
Herne Bay, Kent CT6 6GZ, U.K.
Phone: +44 (0) 1227 741741
Fax: +44 (0) 1227 741742
E-mail: info@icomuk.co.uk
URL: <http://www.icomuk.co.uk>

Icom France s.a.s.

Zac de la Plaine,
1 Rue Brindejone des Moulinais, BP 45804,
31500 Toulouse Cedex 5, France
Phone: +33 (5) 61 36 03 03
Fax: +33 (5) 61 36 03 00
E-mail: icom@icom-france.com
URL: <http://www.icom-france.com>

Icom (Australia) Pty. Ltd.

Unit 1 / 103 Garden Road,
Clayton, VIC 3168 Australia
Phone: +61 (03) 9549 7500
Fax: +61 (03) 9549 7505
E-mail: sales@icom.net.au
URL: <http://www.icom.net.au>

Icom New Zealand

39C Rennie Drive, Airport Oaks,
Auckland, New Zealand
Phone: +64 (09) 274 4062
Fax: +64 (09) 274 4708
E-mail: inquiries@icom.co.nz
URL: <http://www.icom.co.nz>

OPTIONS

Some options may not be available in some countries. Please ask your dealer for details.



Battery packs	Type	Capacity	Operating time*
BP-278	Li-ion 7.2V	1130mAh (min.) 1190mAh (typ.)	9 hours (Approx.)
BP-279	Li-ion 7.2V	1485mAh (min.) 1570mAh (typ.)	12 hours (Approx.)
BP-280	Li-ion 7.2V	2280mAh (min.) 2400mAh (typ.)	18 hours (Approx.)

* Tx: Rx: standby = 5:5:90 duty cycle. Power save function ON.

RAPID CHARGER



MULTI-CHARGER



BELT CLIP



** BC-123SA for USA plug. SE for Europe plug. SV for Australia plug. SUK for UK plug.

CIGARETTE LIGHTER CABLE & POWER SUPPLY CABLE



CHARGER BRACKET



PTT SWITCH CABLE AND PLUG ADAPTER CABLE



STUBBY ANTENNAS



STANDARD ANTENNAS

- FA-SC26VS: 136–144MHz
- FA-SC27VS: 142–150MHz
- FA-SC56VS: 150–162MHz
- FA-SC57VS: 160–174MHz
- FA-SC26US: 400–450MHz
- FA-SC73US: 450–490MHz

CUT ANTENNAS

- FA-SC61VC: 136–174MHz
- FA-SC61UC: 380–520MHz

SPEAKER-MICROPHONES

- HM-168LWP: Waterproof speaker microphone
- HM-171GPW: GPS speaker microphone
- HM-158LA: Compact type speaker microphone
- HM-159LA: Full size durable speaker microphone

EARPHONE-MICROPHONES

- HM-153LA: Durable earphone microphone
- HM-166LA: Light-weight earphone microphone

HEADSETS

- HS-94LWP: Earphone-headset
- HS-95LWP: Behind-the-head headset
- HS-97: Throat microphone (Use with VS-4LA or OPC-2004LA)

CHARGER ADAPTER

- AD-130: AD-130 charger adapter is supplied with the BC-214.

Supplied accessories: (May differ depending on version)

- Battery pack, BP-280
- Desktop charger, BC-213
- Antenna
- Desktop charger, BC-213
- AC adapter, BC-123S



The "3D GENUINE Icom label" is attached to the rear chassis under the battery.
Check the Icom website for details: <http://www.icom.co.jp/world/genuine-info/>