
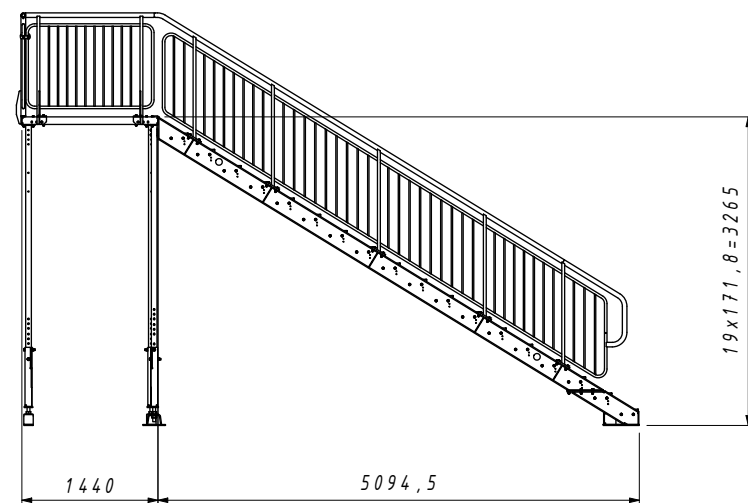


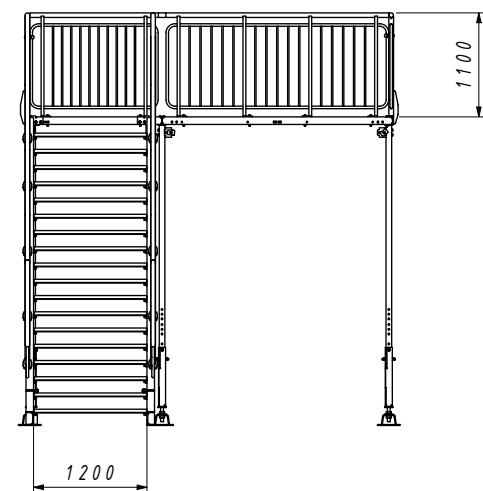

VAR.3 Railing Standard type
Distributed load - 5kN/m2
Point load - 4kN (100x100)mm

Notes:
1. Execution class: EXC2
2. Steps: grating 305x1200 34x38 40x3
3. Rails: standard
4. Landing: grating 2350x650 34x38 30x2
5. Landing: grating 1350x650 34x38 30x2
6. Steel grades: S355, S235 for grating as per EN 10025
7. Structure tested as per EN ISO 13920, class C and G
8. Surface preparation Sa 2 1/2 as per ISO 8501
9. Zinc coating: hot dip galvanized coating as per EN ISO 1461

All foundations dimensions: 300x300x1100mm

Foundation level of stairs
and container need to be
the same

