
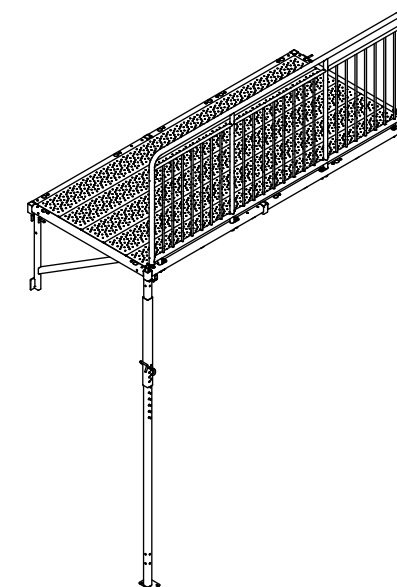
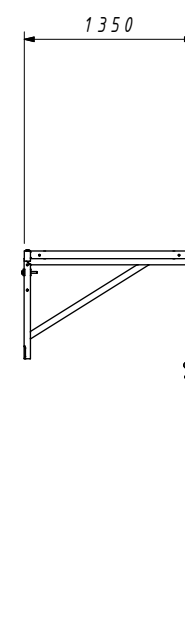


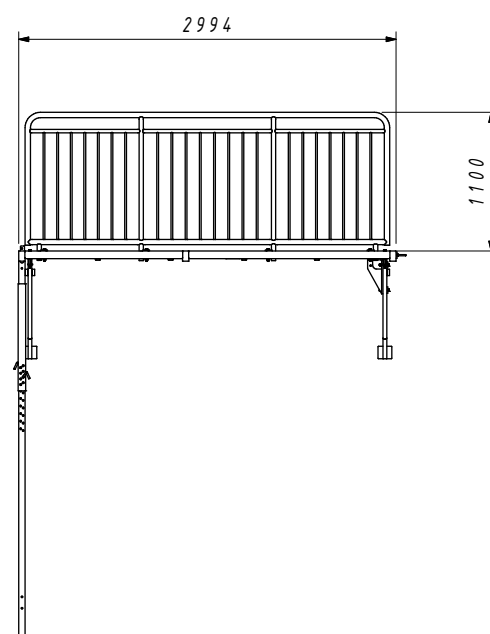

VAR 25-1,2 Railing standard type
Distributed load - 3kN/m²
Point load - 1.5kN (200x200)mm

Notes:

1. Execution class: EXC2
2. Rails: standard
3. Landing: grating 248x2892 OFF SHORE TYPE AP40
4. Steel grades: S355, S235 for grating as per EN 10025
5. Structure tested as per EN ISO 13920, class C and G
6. Surface preparation Sa 2 1/2 as per ISO 8501
7. Zinc coating: hot dip galvanized coating as per EN ISO 1461

All foundations dimensions: 300x300x1100mm

Foundation level of stairs
and container need to be
the same

