
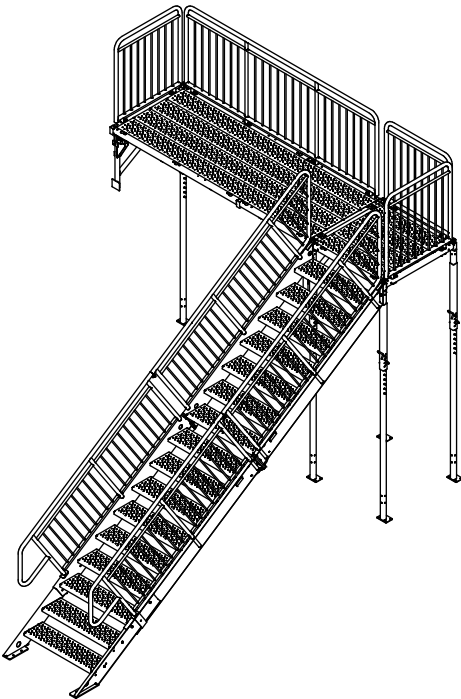
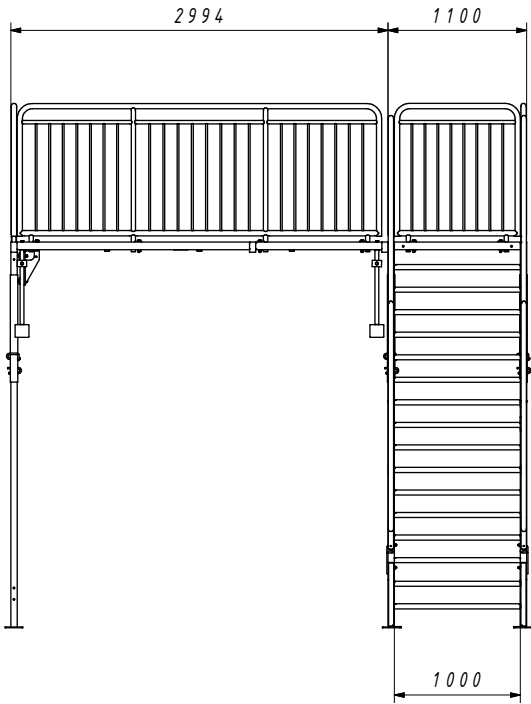


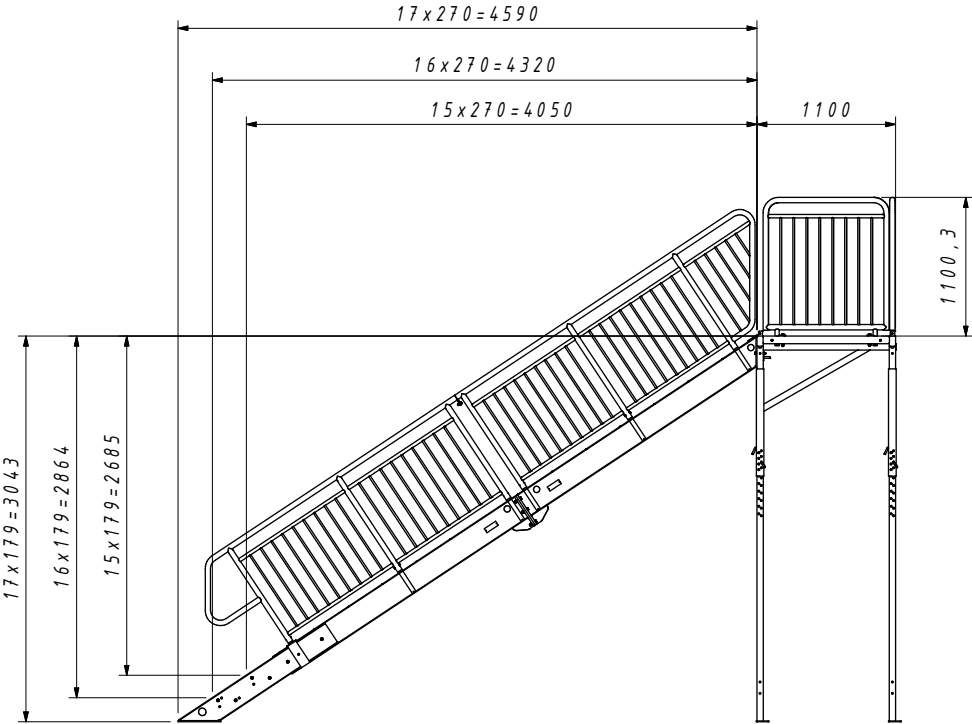

VAR 23-1,1 Railing standard type

Distributed load - 3kN/m2

Point load - 1.5kN (200x200)mm

Notes:

1. Execution class: EXC2

2. Steps: grating: 280x1000 OFF SHORE TYPE AP40

3. Rails: standard

4. Landing: grating 248x2892 OFF SHORE TYPE AP40

5. Landing: grating 248x1000 OFF SHORE TYPE AP40

6. Steel grades: S355, S235 for grating as per EN 10025

7. Structure teasted as per EN ISO 13920, class C and G

8. Surface preparation Sa 2 1/2 as per ISO 8501

9. Zinc coating: hot dip galvanized coating as per EN ISO 1461

Foundations according to container height	
Container height	Distance L
2590	3930
2800	4200
2960	4470
All foundations dimensions: 300x300x1100mm	

Foundation level of stairs
and container need to be
the same

