



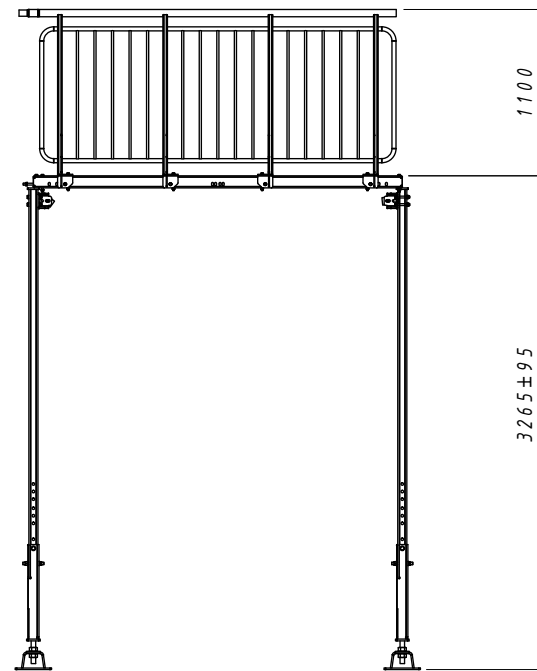

|                                                                |
|----------------------------------------------------------------|
| VAR.5 Railing standard type                                    |
| Distributed load - 5kN/m2                                      |
| Point load - 4kN (100x100)mm                                   |
| Notes:                                                         |
| 1. Execution class: EXC2                                       |
| 2. Steps:                                                      |
| 3. Rails: Standard                                             |
| 4. Landing: Welded grating 2350x650 34x38 30x2                 |
| 5. Steel grades: S355, S235 for grating as per EN 10025        |
| 6. Structure tested as per EN ISO 13920, class C and G         |
| 7. Surface preparation Sa 2 1/2 as per ISO 8501                |
| 8. Zinc coating: hot dip galvanized coating as per EN ISO 1461 |

All foundations dimensions: 300x300x1100mm

Foundation level of stairs  
and container need to be  
the same

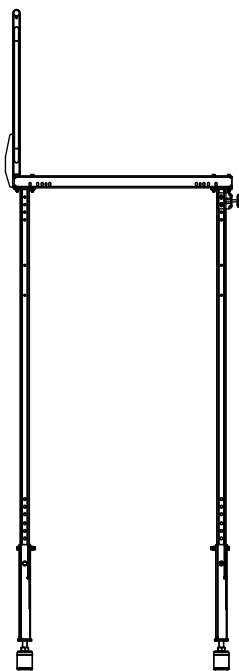