PRODUCT DATASHEET
LB FLEX 1500 P 105W 840 VW

LOW BAY FLEX 1500 | Low-bay luminaires with attractive linear design, up to 160 lm/W



PERFOR-
MANCE
CLASS

Areas of application

- Replacement for luminaires with mercury vapor or metal halide lamps
- Warehouses
- Logistics halls
- Industrial and storage facilities
- Discounters, supermarkets
- Sports halls
- Indoor sports facilites

Product benefits

- Economical thanks to high luminous efficacy up to 160 lm/W
- Easy and quick installation thanks to toolless connector box with 5- and 7-pole terminals
- Modern and robust design
- 5 years guarantee

Product features

- Different luminous flux and beam angle for mounting heights of ~ 4 m to ~14 m in 4000 K
- Through-wiring cable already installed
- Long Lifetime (L80/B10): up to 100,000 h
- High color consistency: ≤ 3 SDCM

© 2026, LEDVANCE GmbH. All rights reserved.

TECHNICAL DATA


Electrical data

Nominal wattage	105 W
Nominal voltage	220…240 V
Mains frequency	50…60 Hz
Nominal current	450 mA
Inrush current	31.16 A
Inrush current time T_{h50}	420 µs
Max. number of luminaires per miniature circuit breaker B16	10
Max. number of luminaires per miniature circuit breaker C10	18
Max. number of luminaires per miniature circuit breaker C16	18
Power factor λ	≥0.90
Maximum total harmonic distortion	≤ 20 %
Protection class	I
Operating mode	Electronic control gear (ECG)


Photometrical data

Luminous flux	16800 lm
Luminous efficacy	160 lm/W
Color temperature	4000 K
Light color (designation)	Cool White
Color rendering index Ra	≥80
Standard deviation of color matching	< 3 sdcm
Low flicker	Yes
Photobiological safety group acc. to EN62778	RG1
Photobiological safety group acc. to EN62471	RG1
Beam angle	120 °


© 2026, LEDVANCE GmbH. All rights reserved.




LB FLEX 1500 P 105W 840 VW



LB FLEX 1500 P 105W 840 VW WITH BP COVER



LB FLEX 1500 P 105W 840 VW




LB FLEX 1500 P 105W 840 VW WITH BP COVER

Dimensions & Weight

Length	1527 mm
Width	115.00 mm
Height	65.00 mm
Product weight	3850.00 g

© 2026, LEDVANCE GmbH. All rights reserved.



LOW BAY FLEX 1500

Materials & Colors

Product color	White
Housing color	White
RAL Color (most similar)	RAL 9003
Body material	Steel
Cover material	Polycarbonate (PC)
Light emitting surface material	Polycarbonate (PC)
Glow Wire Test according to IEC 60695-2-12	650 °C
Mercury content	0.0 mg

Application & Mounting

Ambient temperature range	-25…+50 °C
Temperature range at storage	-20…+80 °C
Type of connection	Screwless terminal
Type of protection	IP23
Protection class IK (shock resistance)	IK08
Dimmable	No
Mounting type	Surface/Suspended
Mounting location	Ceiling
Application environment	Indoor
Mechanically adjustable	No
With light source	Yes
Replaceable light source	No

© 2026, LEDVANCE GmbH. All rights reserved.

Lifespan

Lifespan L70/B50 at 25 °C	100000 h [1)]
Lifespan L80/B10 at 25 °C	100000 h [1)]
Lifespan L80/B50 at 25 °C	100000 h
Lifespan L90/B10 at 25 °C	82000 h [1)]
Number of switching cycles	50000

1) t[h]: L70 / B50 @ 25 °C (Ta), t[h]: L80 / B10 @ 25 °C (Ta), t[h]: L90 / B10 @ 25 °C (Ta)

Control gear

Output current	460 mA
Output ripple current (100 Hz)	< 10 %

Certificates & Standards

Standards	CE / CB / ENEC / TÜV SÜD / EAC / UKCA / EPD
Luminaire with limited surface temperature, "D sign"	No
Ball shot safe	No
EPD	LEDV-00020-V01.01-EN

Accessories Optional

Product image	Product name	EAN
	LB FLEX SUSPENSION KIT	4058075693722

EQUIPMENT / ACCESSORIES

– Suspension kit, ball-proof cover and angulation mounting kit available as separate accessory

DOWNLOAD DATA

	Documents and certificates	Document name
PDF	User instruction / safety instructions	UI Lowbay Flex
PDF	Legal information	Legal Insert LB FLEX
PDF	Legal information	LS Insert LB FLEX DALI
PDF	Legal information	Informationstext 18 Abs 4 ElektroG

© 2026, LEDVANCE GmbH. All rights reserved.

	Documents and certificates	Document name
PDF	Declarations of conformity	EU Declaration of conformity LB FLEX
PDF	Declarations of conformity UKCA	LB FLEX 840
PDF	EPD	EPD EN LOW BAY FLEX

	Photometric and lighting design files	Document name
IES	IES file (IES)	LB FLEX 1500 P 105W 840 VW
IES	IES file (IES)	LB FLEX 1500 P 105W 840 VW WITH BP COVER
LDT	LDT file (Eulumdat)	LB FLEX 1500 P 105W VW
LDT	LDT file (Eulumdat)	LB FLEX 1500 P 105W 840 VW WITH BP COVER
ULD	ULD file (DIALux)	LB FLEX 1500 P 105W
ROLF	ROLF file (RELUX)	LB FLEX 1500 P 105W 840 VW
	UGR file (UGR table)	LB FLEX 1500 P 105W 840 VW
	UGR file (UGR table)	LB FLEX 1500 P 105W 840 VW WITH BP COVER
	Light distribution curve type cone	LB FLEX 1500 P 105W 840 VW
	Light distribution curve type cone	LB FLEX 1500 P 105W 840 VW WITH BP COVER
	Light distribution curve type polar	LB FLEX 1500 P 105W 840 VW
	Light distribution curve type polar	LB FLEX 1500 P 105W 840 VW WITH BP COVER

	CAD/BIM files	Document name
RFA	BIM Revit 3D	LOW BAY FLEX
STEP	CAD STEP 3D	LB FLEX 1500

© 2026, LEDVANCE GmbH. All rights reserved.


	Tender texts	Document name
	Tender documents	LOW BAY FLEX 1500 P 105W 840 VW-EN


LOGISTICAL DATA


Product code	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Gross weight	Volume
4058075676282	Folding box 1	106 mm x 1,572 mm x 154 mm	4305.00 g	25.66 dm^3
4058075676299	Shipping box 3	1,602 mm x 488 mm x 143 mm	15380.00 g	111.79 dm^3


The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

ADDITIONAL CATALOG INFORMATION

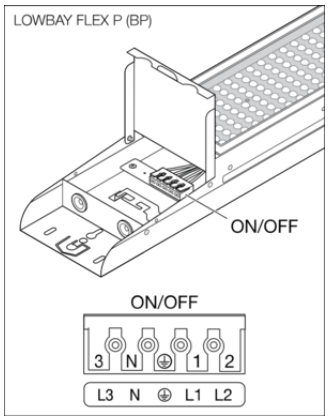







References / Links

– For Guarantee see www.ledvance.com/guarantee

DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.

© 2026, LEDVANCE GmbH. All rights reserved.