PRODUCT DATASHEET
PANEL INDV 625 33W 4000K 4000LM

PANEL IndiviLED® 625 GEN 1 | Square recessed luminaire with IndiviLED® optics, 625mm

GERMAN DESIGN AWARD NOMINEE 2019



PERFOR-MANCE CLASS

Areas of application

- Direct replacement for luminaires with fluorescent lamps
- Corridors
- Offices
- Conference rooms
- Reception areas
- Foyers
- Elevators
- Suitable for recessed ceiling systems with grid size of 625 x 625 mm

Product benefits

- Homogenous light distribution and reduced glare thanks to the IndiviLED® optics
- Energy savings of up to 50 % (compared to luminaires that use fluorescent lamps)
- Robust structure with IK08
- Low flicker light thanks to special electronic control gear
- 5 years guarantee

Product features

- Each LED with individual lens and reflector for UGR < 16 and homogenous light distribution
- Lifetime (L80/B50): up to 50,000 h (at 25 °C)
- Metal housing, polycarbonate (PC) lenses and reflectors
- Luminous flux: up to 4,000 lm
- Luminous efficacy: up to 120 lm/W
- Initial color consistency: 3 SDCM
- Glow Wire Test according to IEC 60695-2-12: 850 °C

© 2026, LEDVANCE GmbH. All rights reserved.

– Luminaire versions with IoT-ready DALI-2 driver or IoT Zigbee 3.0 technology available

© 2026, LEDVANCE GmbH. All rights reserved.

TECHNICAL DATA


Electrical data

Nominal wattage	33.00 W
Nominal voltage	220…240 V
Mains frequency	50/60 Hz
Nominal current	180.000 mA
Inrush current	36.4 A
Inrush current time T_{h50}	80 µs
Max. number of luminaires per miniature circuit breaker B16	18
Max. number of luminaires per miniature circuit breaker C10	15
Max. number of luminaires per miniature circuit breaker C16	24
Power factor λ	> 0.90
Protection class	II
Operating mode	External LED driver


Photometrical data

Luminous flux	4000 lm
Luminous efficacy	120 lm/W
Color temperature	4000 K
Light color (designation)	Cool White
Color rendering index Ra	≥80
Standard deviation of color matching	3 sdcm
Luminous intensity	-
Low flicker	Yes
Flickering metric (Pst LM)	-
Stroboscope effect metric (SVM)	-
Photobiological safety group acc. to EN62778	RG1
Beam angle	70 °
UGR	< 16

© 2026, LEDVANCE GmbH. All rights reserved.

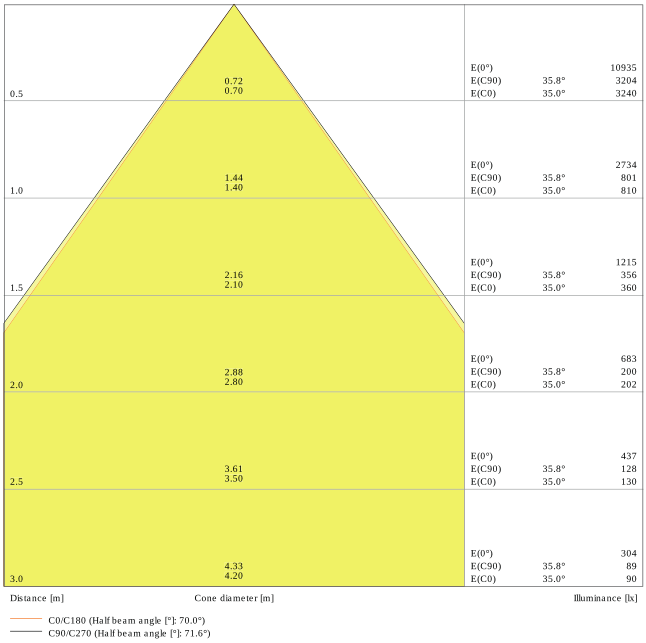

Panel Indv 625 33W 4000K

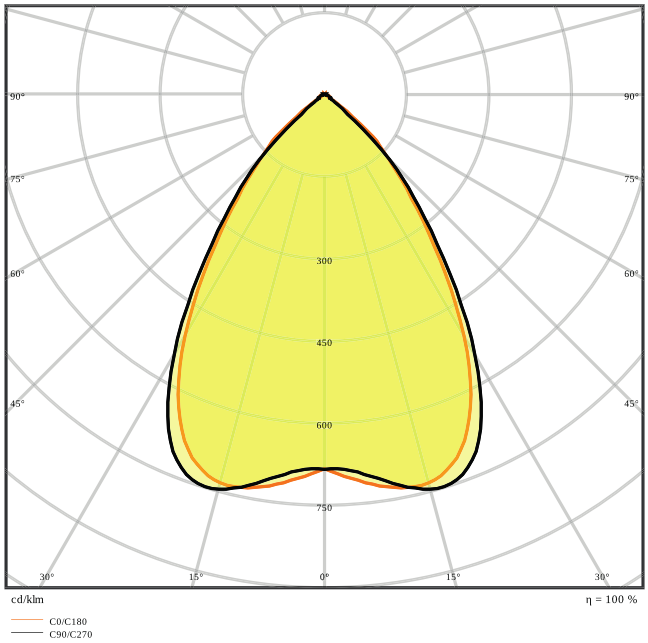


Panel Indv 625 33W 4000K

Dimensions & Weight

Length	620.00 mm
Width	620.00 mm
Height	13.00 mm
Product weight	3600.00 g

© 2026, LEDVANCE GmbH. All rights reserved.

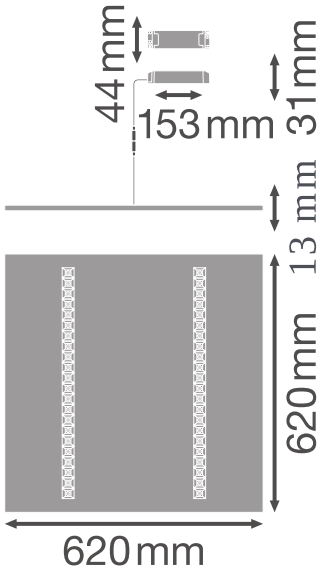

PANEL INDV 625 33W

Materials & Colors

Product color	White
Housing color	White
RAL Color (most similar)	RAL 9003
Body material	Steel
Cover material	Polycarbonate (PC)
Light emitting surface material	Polycarbonate (PC)
Glow Wire Test according to IEC 60695-2-12	850 °C
Mercury content	0.0 mg

Application & Mounting

Ambient temperature range	-20…+45 °C
Type of connection	Screw terminal, 2-Pole (L,N)
Type of protection	IP40
Protection class IK (shock resistance)	IK08
Dimmable	No
Mounting type	Recessed
Mounting location	Ceiling
Application environment	Indoor
Mounting length	600,0 mm

© 2026, LEDVANCE GmbH. All rights reserved.

Mounting width	600,0 mm
Mounting depth	50,0 mm
With light source	Yes
Replaceable light source	No

Lifespan

Lifespan L70/B50 at 25 °C	80000 h [1)]
Lifespan L80/B10 at 25 °C	60000 h [1)]
Lifespan L80/B50 at 25 °C	60000 h
Lifespan L90/B10 at 25 °C	35000 h [1)]
Number of switching cycles	25000

1) t[h]: L70 / B50 @ 25 °C (Ta), t[h]: L80 / B10 @ 25 °C (Ta), t[h]: L90 / B10 @ 25 °C (Ta)

Certificates & Standards

Standards	CE / CB / ENEC / TÜV SÜD / EAC
Luminaire with limited surface temperature, "D sign"	No
Ball shot safe	No
Replaceable light source (EPREL)	Not replaceable

Accessories Optional

Product image	Product name	EAN
	PANEL Suspension Kit	4058075402928
	CONNECTOR BOX 5POLE L/N 4x	4058075473010
	EM CONVERSION BOX	4058075237025
	PANEL RECESSED MOUNT CLIPS VAL 4x	4058075409859

© 2026, LEDVANCE GmbH. All rights reserved.

Product image	Product name	EAN
	CONNECTOR BOX 5POLE L/N/PE/D+/D- 4x	4058075473034

EQUIPMENT / ACCESSORIES

- Accessories for several mounting options available
- Security rope for luminaire included
- External control gear included

DOWNLOAD DATA

	Documents and certificates	Document name
PDF	User instruction / safety instructions	User Instruction Panel IndiviLED 600 625
PDF	Legal information	LSI PANEL INDV
PDF	Legal information	Informationstext 18 Abs 4 ElektroG
PDF	Declarations of conformity	EU declaration of conformity panel IndiviLED

	Photometric and lighting design files	Document name
IES	IES file (IES)	Panel Indv 625 33W 4000K
LDT	LDT file (Eulumdat)	Panel Indiviled 33W 62 cm Warm 3800Lm
ULD	ULD file (DIALux)	PANEL INDV 625 33W-4000K
ROLF	ROLF file (RELUX)	PANEL INDV 625 33W-4000K
	UGR file (UGR table)	Panel Indv 625 33W 4000K
	Light distribution curve type cone	Panel Indv 625 33W 4000K
	Light distribution curve type polar	Panel Indv 625 33W 4000K

	CAD/BIM files	Document name
RFA	BIM Revit 3D	PANEL Indiv

© 2026, LEDVANCE GmbH. All rights reserved.

	CAD/BIM files	Document name
	CAD STEP 3D	PL INDV 625


	Tender texts	Document name
	Tender documents	PANEL IndiviLED 625 33 W 4000K-EN


LOGISTICAL DATA

Product code	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Gross weight	Volume
4058075201194	Folding box 1	668 mm x 723 mm x 38 mm	4024.00 g	18.35 dm^3
4058075201200	Shipping box 3	685 mm x 135 mm x 735 mm	12998.00 g	67.97 dm^3

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

ADDITIONAL CATALOG INFORMATION





References / Links

– For Guarantee see www.ledvance.com/guarantee

DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.

© 2026, LEDVANCE GmbH. All rights reserved.