
PRODUCT DATASHEET
PUSHBUTTON COUPLER DALI-2

PUSHBUTTON COUPLER DALI-2 | DALI-2 interface to integrate standard lighting switches in DALI systems

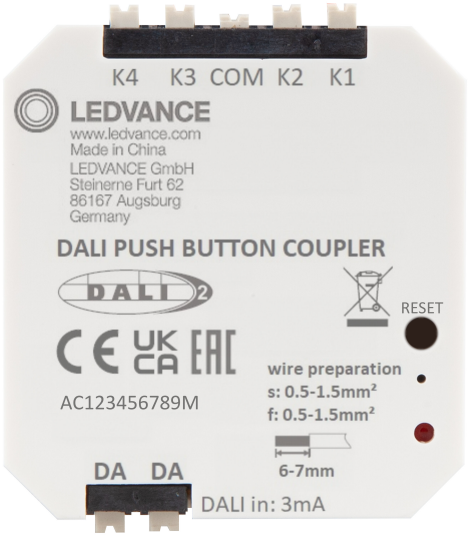

Areas of application

- Single rooms
- Open office spaces
- Restaurants
- Stairways
- Sanitary areas
- Private homes

Product benefits

- Can be combined with standard light buttons
- Powered via DALI bus (no mains connection required)
- Several couplers can be connected to a DALI line
- Easy installation with pre-assembled connection cable
- Compatible with LEDVANCE VIVARES DALI light management system

Product features

- DALI-2 certified pushbutton coupler
- Installation in standard flush-mounted boxes
- 4 potential-free inputs


© 2026, LEDVANCE GmbH. All rights reserved.

TECHNICAL DATA

Electrical data

Nominal wattage	0.20 W
Nominal voltage	16 V
Mains frequency	0 Hz

Dimensions & Weight



Length	50.00 mm
Width	43.00 mm
Height	15.00 mm
Cable cross-section, input side	0.2…1.5 mm^2
Wire preparation length, input side	6…7 mm
Product weight	19.00 g

Colors & materials

Product color	White

Temperatures & operating conditions

Ambient temperature range	-20…+50 °C

Capabilities

Dimmable	Yes
Dimming interface	DALI-2
Type of installation	Integrated in flush device box

Certificates & Standards

Approval marks – approval	CE / UKCA / EAC
Protection class	II
Type of protection	IP20

Safety advice

- All electrical connections must be made by a qualified person.
- Disconnect mains before installation.

© 2026, LEDVANCE GmbH. All rights reserved.

DOWNLOAD DATA

	Documents and certificates	Document name
PDF	User instruction / safety instructions	PUSHBUTTON COUPLER DALI-2
PDF	Legal information	Legal Insert DALI COMPONENTS
PDF	Legal information	Informationstext 18 Abs 4 ElektroG
PDF	Declarations of conformity	PUSHBUTTON COUPLER DALI-2
PDF	Declarations of conformity UKCA	PUSHBUTTON COUPLER DALI-2


	Tender texts	Document name
TXT	Tender documents	DALI-2 PUSH BUTTON COUPLER-EN


LOGISTICAL DATA

Product code	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Gross weight	Volume
4058075837607	Folding box 1	45 mm x 86 mm x 100 mm	44.00 g	0.39 dm^3
4058075837614	Shipping box 20	245 mm x 192 mm x 225 mm	1154.00 g	10.58 dm^3

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

ADDITIONAL CATALOG INFORMATION





References / Links

– For current information see www.ledvance.com/light-management-systems

DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.

© 2026, LEDVANCE GmbH. All rights reserved.