PRODUCT DATASHEET
FL AREA V 32W ML 830 A48X85 BK

FLOODLIGHT AREA GEN 2 | Floodlight with asymmetric light distribution with up to 150 lm/W



Areas of application

- Replacement for floodlights with halogen lamps
- Outdoor use (IP66)
- D-sign according to EN 60598-2-24 for fire-risk commercial unit, e.g. by accumulation of dust
- Public areas
- Sports facilities
- Construction areas
- Parking
- Logistics areas, transport facilities and corridors

Product benefits

- Breather membrane to optimize air exchange, without compromising IP protection
- Highly versatile due to selectable lumen steps (Multi Lumen) on the housing
- Robust cable gland with integrated waterstop function
- High light uniformity and low glare light thanks to precise lens design
- Robust and weatherproof: IP66 / IK08, C4 corrosion protection for harsh environments
- Effective thermal management: up to 75,000 operating hours lifespan
- Insect-friendly: 3000 K light protects wildlife, supports subsidies
- Energy savings of up to 90 % compared to halogen lamp floodlights
- No upper light output ratio (ULOR 0%) when mounted at 0° tilt

Product features

- High luminous output up to 25.000 lm, with top efficiency up to 150 lm/W
- Asymmetric light distribution for various application areas
- Multi Lumen function to adjust brightness levels to suit specific needs
- Type of protection: IP66
- Corrosion resistance C4: suitable for use in environments with moderate salinity
- Pre-installed, flexible 1 m cable (H05RN-F), wrapped 3 x 1.0 mm^2 single wires
- Mounting bracket with 30° angle and wide rotation area

© 2026, LEDVANCE GmbH. All rights reserved.

TECHNICAL DATA


Electrical data

Nominal wattage	32 W / 22 W
Nominal voltage	220…240 V
Mains frequency	50…60 Hz
Nominal current	160/115 mA
Inrush current	8.1 A
Inrush current time T_{h50}	43.5 µs
Max. number of luminaires per miniature circuit breaker B16	80
Max. number of luminaires per miniature circuit breaker C10	50
Max. number of luminaires per miniature circuit breaker C16	80
Power factor λ	> 0.90
Maximum total harmonic distortion	< 20 %
Protection class	I
Surge capability (L-N)	2 kV
Surge capability (L/N-Ground)	4 kV
Operating mode	Integrated LED driver


Photometrical data

Luminous flux	4200 lm / 3000 lm
Luminous efficacy	131 lm/W / 136 lm/W
Color temperature	3000 K
Light color (designation)	Warm White
Color rendering index Ra	> 80
Standard deviation of color matching	5 sdcm
Low flicker	Yes
Flickering metric (Pst LM)	≤1
Stroboscope effect metric (SVM)	<0.9
Photobiological safety group acc. to EN62778	RG0
Photobiological safety group acc. to EN62471	RG0
Beam angle	48° x 85 °

© 2026, LEDVANCE GmbH. All rights reserved.

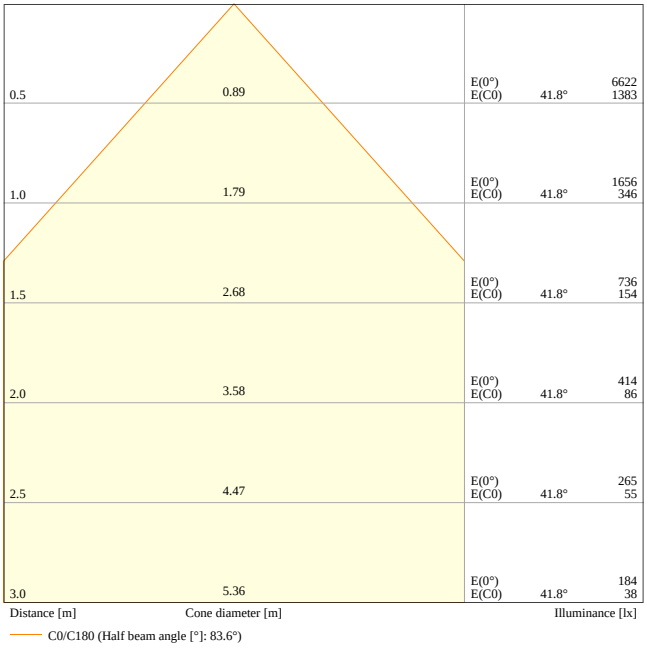

FL AREA V 32W ML 830 A48x85 BK

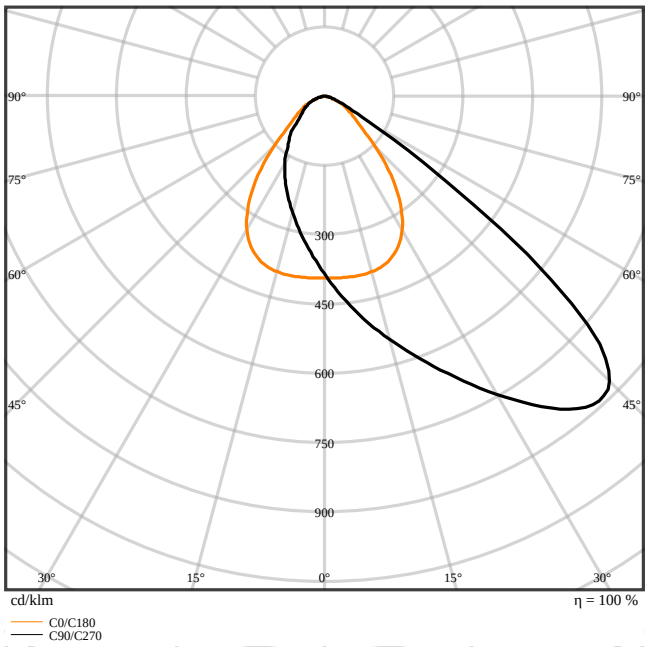

FL AREA V 32W ML 830 A48x85 BK


Adjustable attributes

Nominal wattage	Color temperature	Luminous flux	Luminous efficacy
32 W	3000 K	4200 lm	131 lm/W
22 W	3000 K	3000 lm	136 lm/W

Dimensions & Weight

Length	201.00 mm
Width	179.00 mm
Height	43.00 mm
Product weight	850.00 g
Cable length	1000 mm

© 2026, LEDVANCE GmbH. All rights reserved.



FL 50 P SY100

Materials & Colors

Product color	Black
Housing color	Black
RAL Color (most similar)	RAL 9017
Body material	Aluminum
Cover material	Glass
Light emitting surface material	Glass
Glow Wire Test according to IEC 60695-2-12	650 °C
Mercury content	0.0 mg

Application & Mounting

Ambient temperature range	-30…+50 °C
Temperature range at storage	-40…+80 °C
Type of connection	Cable, 3-pole
Type of protection	IP66
Protection class IK (shock resistance)	IK07
Corrosion resistance class acc. to EN 12944	C4 Medium
Dimmable	No
Mounting type	Surface
Mounting location	Wall / Pole / Floor / Ceiling
Application environment	Outdoor
Mounting height	5 m
Mechanically adjustable	Yes
With light source	Yes
Replaceable light source	No

© 2026, LEDVANCE GmbH. All rights reserved.

Lifespan

Lifespan L70/B50 at 25 °C	100000 h [1)]
Lifespan L80/B10 at 25 °C	75000 h [1)]
Lifespan L90/B10 at 25 °C	35000 h [1)]
Number of switching cycles	100000

1) t[h]: L70 / B50 @ 25 °C (Ta), t[h]: L80 / B10 @ 25 °C (Ta), t[h]: L90 / B10 @ 25 °C (Ta)

Control gear

Output current	250 mA
Output ripple current (100 Hz)	20 %

Emergency lighting

Type of emergency operation test	None

Certificates & Standards

Standards	CE / CB / ENEC / Dmark / UKCA / EAC / EPD
Luminaire with limited surface temperature, "D sign"	Yes
Ball shot safe	No
EPD	LEDV-00049-V01.01-EN

Additional product data

Added function	MULTI LUMEN

Safety advice

- Max. wind load surface 16 W = 0,015 m^2 / 32 W = 0,025 m^2 / 50 W = 0,045 m^2 / 67 W = 0,070 m^2 / 100 W = 0,085 m^2 / 133 W and 160 W = 0,105 m^2
- All electrical connections must be made by a qualified person.
- Caution, risk of electric shock.
- The external flexible cable or cord of this luminaire cannot be replaced; if the cord is damaged, the luminaire must be disposed of.
- Terminal block not included. Installation must be made by a qualified person.
- To reduce the risk of strangulation the flexible wiring connected to this luminaire shall be effectively fixed to the wall if the wiring is within arm's reach.
- Product in protection class I. All electrically conductive, metallic housing parts that can absorb voltage during operation or during maintenance in the event of a fault must be continuously connected to the protective earthing conductor.

DOWNLOAD DATA

	Documents and certificates	Document name
PDF	User instruction / safety instructions	FLOODLIGHT AREA

© 2026, LEDVANCE GmbH. All rights reserved.

	Documents and certificates	Document name
PDF	Legal information	Informationstext 18 Abs 4 ElektroG
PDF	Legal information	LSI FL AREA Gen2
PDF	Legal information	Safety Insert G11205496
PDF	Legal information	Legal Insert G11277401
PDF	Declarations of conformity	CE declaration FLOODLIGHT AREA
PDF	Declarations of conformity UKCA	UKCA declaration FLOODLIGHT AREA
PDF	EPD	EPD EN FLOODLIGHT AREA GEN 2

	Photometric and lighting design files	Document name
IES	IES file (IES)	FL AREA V 32W ML 830 A48x85 BK
LDT	LDT file (Eulumdat)	FL AREA V 32W ML 830 A48x85 BK
	Light distribution curve type cone	FL AREA V 32W ML 830 A48x85 BK
	Light distribution curve type polar	FL AREA V 32W ML 830 A48x85 BK

	CAD/BIM files	Document name
RFA	BIM Revit 3D	Floodlight Area G2
STEP	CAD STEP 3D	FL AREA V 32W ML

	Tender texts	Document name
TXT	Tender documents	FLOODLIGHT AREA GEN 2 32W ML 830 A48X85 BK-en

LOGISTICAL DATA


Product code	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Gross weight	Volume
4099854427183	Folding box 1	69 mm x 206 mm x 180 mm	931.00 g	2.56 dm^3

© 2026, LEDVANCE GmbH. All rights reserved.

Product code	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Gross weight	Volume
4099854427190	Shipping box 8	426 mm x 292 mm x 205 mm	7999.00 g	25.50 dm^3

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

ADDITIONAL CATALOG INFORMATION



	A	B	C	
16W	78	58	6.5	2x M5
32 W	108	78	8.5	2x M6
50 W	150	108	8.5	2x M6
67 W	150	108	10.5	2x M8
100 W	170	118	10.5	2x M8
133 W	170	118	12.5	2x M10
160 W	170	118	12.5	2x M10

	m^2
16W	0.015 m^2
32 W	0.025 m^2
50 W	0.045 m^2
67 W	0.070 m^2
100 W	0.085 m^2
133 W	0.105 m^2
160 W	0.105 m^2

	230 Vac		
	C10A	B16A	C16A
16W	106	133	170
32 W	54	87	87
50 W	31	47	50
67 W	20	32	32
100 W	4	4	7
133 W	4	4	7
160 W	3	3	6

References / Links

– For Guarantee see www.ledvance.com/guarantee

DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.

© 2026, LEDVANCE GmbH. All rights reserved.