
PRODUCT DATASHEET
Y-CONNECTOR MULTI3

Y-CONNECTOR | Branching for light management systems

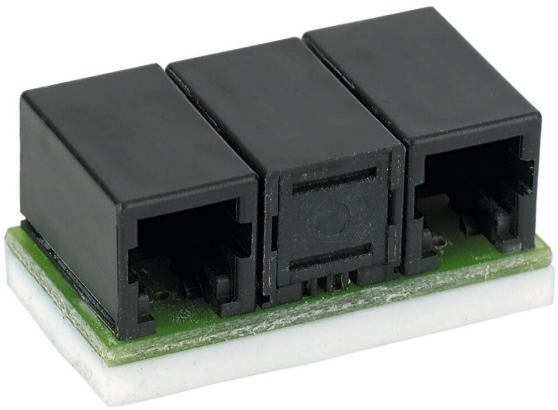

Areas of application

- Suitable for all OSRAM components with modular 4p4c connector system

Product benefits

- For parallel connection of sensors to a MULTIeco, MULTI 3, DALIeco system
- Enables synchronization and connection of multiple EASY system components

Product features

- Passive distributor
- Connections: 3x modular 4p4c socket
- Type of installation: Adhesive pad mounting on smooth surfaces

© 2026, products of OSRAM GmbH, distributed by LEDVANCE GmbH. All rights reserved.

TECHNICAL DATA

Electrical data

Nominal wattage	1.00 W
Mains frequency	0 Hz

Dimensions & Weight

Length	34.00 mm
Width	18.00 mm
Height	16.00 mm
Product weight	80.00 g

Capabilities

Dimmable	No

Certificates & Standards

Approval marks – approval	CE
Protection class	III
Type of protection	IP20

EQUIPMENT / ACCESSORIES

– 2 connecting cables included, modular 4p4c connector on both ends, length 2.1 m

DOWNLOAD DATA

	Documents and certificates	Document name
PDF	User instruction / safety instructions	334148_Y-CONNECTOR – branch element
PDF	Declarations of conformity	334067_LMS MULTI3 SENSORS

LOGISTICAL DATA

Product code	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Gross weight	Volume
4050300803135	Folding box 1	215 mm x 35 mm x 43 mm	92.00 g	0.32 dm^3
4050300803142	Shipping box 25	224 mm x 190 mm x 220 mm	2465.00 g	9.36 dm^3

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.

© 2026, products of OSRAM GmbH, distributed by LEDVANCE GmbH. All rights reserved.