PRODUCT DATASHEET
OT CABLE CLAMP D-STYLE

OPTOTRONIC® Cable Clamp | Driver accessories



Areas of application

- Downlights, flat luminaires
- Suitable for different cable types
- Suitable for indoor installations

Product benefits

- Simple and quick cable mounting
- Sufficient space for cable connection
- Cost-effective and space-saving solution (TL version)
- Free cable connection thanks to open flaps
- Immediate installation thanks to pre-assembled cable clamps


Product features

- Easy to install and flexible cable clamps
- Separate cable clamps for primary and secondary side
- Pre-fixed, captive screws
- Through-looping (TL version)

© 2026, products of OSRAM GmbH, distributed by LEDVANCE GmbH. All rights reserved.

TECHNICAL DATA

Dimensions & Weight

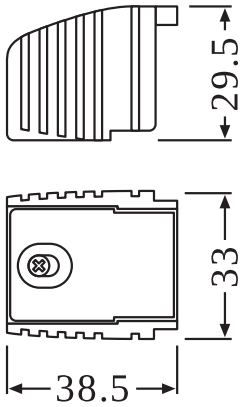

Length	38.5 mm
Width	33.0 mm
Height	29.5 mm
Product weight	28.6 g

Temperatures & operating conditions

Max.housing temperature in case of fault	110 °C
Permitted rel. humidity during operation	5…85 % [1]

[1] Maximum 56 days/year at 85 %

LOGISTICAL DATA

Temperature range at storage	-40…+85 °C

DOWNLOAD DATA

	CAD/BIM files	Document name
	CAD STEP 3D	D-Style-CableClamp
ZIP	CAD data 3D PDF	CAD Data D-Style-CableClamp PDF

LOGISTICAL DATA

Product code	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Gross weight	Volume
4052899077904	Unpacked 2	38 mm x 29 mm x 32 mm	28.60 g	0.04 dm^3

© 2026, products of OSRAM GmbH, distributed by LEDVANCE GmbH. All rights reserved.

Product code	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Gross weight	Volume
4052899077911	Shipping box 40	178 mm x 84 mm x 141 mm	1221.00 g	2.11 dm^3

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.

© 2026, products of OSRAM GmbH, distributed by LEDVANCE GmbH. All rights reserved.