PRODUCT DATASHEET
PL COMP 1200 V 35W 940 U19

PANEL COMPACT 1200 UGR<19 CRI90 | Rectangular recessed panel luminaire with low glare and CRI90, for 1200 x 300 mm ceiling systems



VALUE CLASS

Areas of application

- Direct replacement for luminaires with fluorescent lamps
- Offices, conference rooms
- Reception areas, foyers, corridors, elevators
- Suitable for recessed ceiling systems with grid size of 1200 x 300 mm

Product benefits

- High color rendering index (Ra>90) with up to 104 lm/W
- Good glare reduction (UGR < 19)
- Low flicker light thanks to special electronic control gear
- External driver with an optional 3-pole through-wiring feature
- Versions with DALI ECG available
- 5 years guarantee

Product features

- Extruded aluminum frame
- Polystyrene diffuser
- Lifetime (L80/B10): up to 50,000 h (at 25 °C)

© 2026, LEDVANCE GmbH. All rights reserved.

TECHNICAL DATA


Electrical data

Nominal wattage	35.00 W
Nominal voltage	220…240 V
Mains frequency	50…60 Hz
Nominal current	150.000 mA
Inrush current	11.2 A
Inrush current time T_{h50}	50 µs
Max. number of luminaires per miniature circuit breaker B16	67
Max. number of luminaires per miniature circuit breaker C10	53
Max. number of luminaires per miniature circuit breaker C16	85
Power factor λ	> 0.90
Maximum total harmonic distortion	< 10 %
Protection class	II
Operating mode	External LED driver


Photometrical data

Luminous flux	3640 lm
Luminous efficacy	104 lm/W
Color temperature	4000 K
Light color (designation)	Cool White
Color rendering index Ra	> 90
Standard deviation of color matching	≤5 sdcm
Low flicker	Yes
Flickering metric (Pst LM)	<1
Stroboscope effect metric (SVM)	< 0.4
Photobiological safety group acc. to EN62778	RG0
Beam angle	90 °
UGR	< 19

© 2026, LEDVANCE GmbH. All rights reserved.

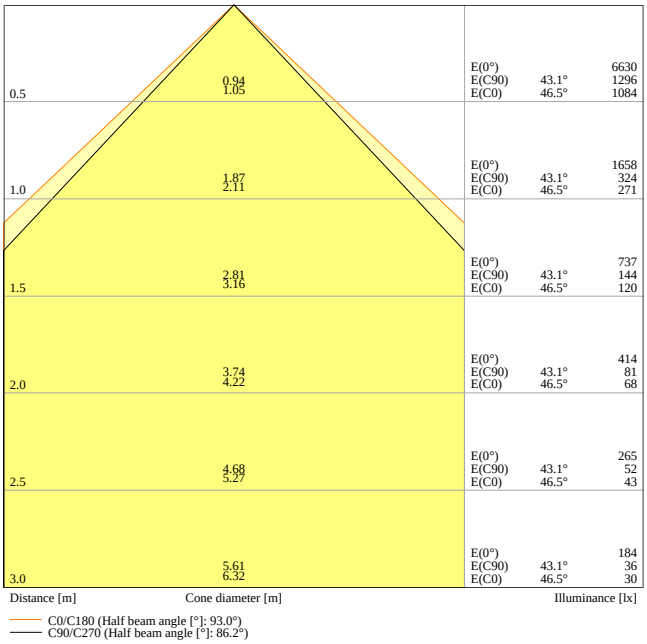


PL COMP 1200 V 35W 940 U19 EM CONVERSION BOX

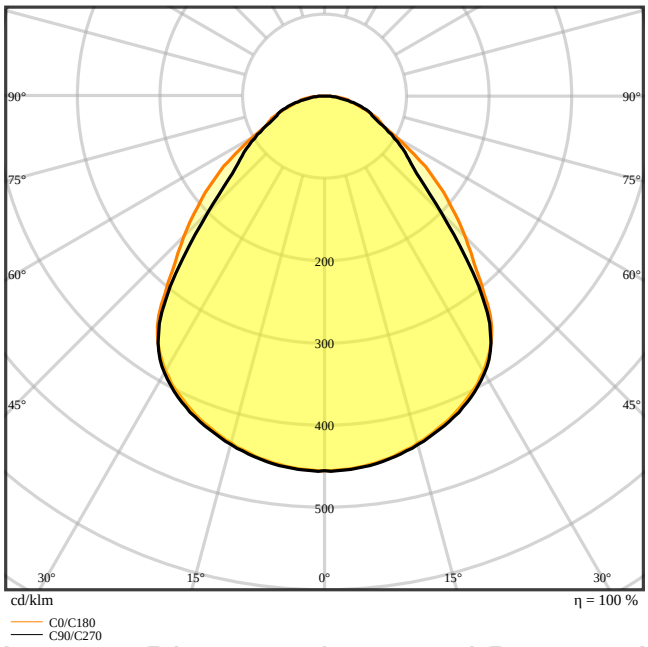

PL COMP 1200 V 35W 940 U19 EM CONVERSION BOX

Dimensions & Weight

Length	1195.00 mm
Width	295.00 mm
Height	34.00 mm
Product weight	1790.00 g



PL COMP1200 V

© 2026, LEDVANCE GmbH. All rights reserved.

Materials & Colors

Product color	White
Housing color	White
RAL Color (most similar)	RAL 9003
Body material	Aluminum
Cover material	Polystyrene (PS)
Light emitting surface material	Polystyrene
Glow Wire Test according to IEC 60695-2-12	650 °C
Mercury content	0.0 mg

Application & Mounting

Ambient temperature range	-10…+45 °C
Temperature range at storage	-20…+70 °C
Type of connection	Screwless terminal, 2-Pole (L, N)
Type of protection	IP40/IP20
Protection class IK (shock resistance)	IK02
Dimmable	No
Mounting type	Recessed/Suspended/Surface
Mounting location	Ceiling
Application environment	Indoor
Mounting length	1190 mm
Mounting width	290 mm
Mounting depth	50,0 mm
Mechanically adjustable	No
With light source	Yes
Replaceable light source	No

Lifespan

Lifespan L70/B50 at 25 °C	70000 h [1)]
Lifespan L80/B10 at 25 °C	50000 h [1)]
Lifespan L80/B50 at 25 °C	50000 h
Lifespan L90/B10 at 25 °C	40000 h [1)]
Number of switching cycles	50000

1) t[h]: L70 / B50 @ 25 °C (Ta), t[h]: L80 / B10 @ 25 °C (Ta), t[h]: L90 / B10 @ 25 °C (Ta)

Control gear

Output current	750 mA

© 2026, LEDVANCE GmbH. All rights reserved.

Output ripple current (100 Hz)	< 7 %
ECG - Length	116.7 mm
ECG - Width	49.9 mm
ECG - Height	27 mm
Recommended control gear	LEDV DR DALI-P-44/220-240/1050

Emergency lighting

Type of Emergency Lighting (EL)	Optional EL unit (battery and controller) for decentral operation available separately

Certificates & Standards

Standards	CE / CB / ENEC / UKCA / EAC / EPD
Luminaire with limited surface temperature, "D sign"	No
Ball shot safe	No
EPD	LEDV-00008-V01.01-EN
Replaceable light source (EPREL)	Not replaceable

Accessories Optional

Product image	Product name	EAN
	CONNECTOR BOX 5POLE L/N/PE/D+/D- 4x	4058075473034
	EM CONVERSION BOX	4058075237025
	CONNECTOR BOX 5POLE L/N 4x	4058075473010
	PANEL 1200x300 RECESSED MOUNT FRAME	4058075472976
	PANEL RECESSED MOUNT CLIPS VAL 4x	4058075409859

© 2026, LEDVANCE GmbH. All rights reserved.

Product image	Product name	EAN
	PANEL Suspension Kit	4058075402928
	PANEL 1200 X 300 SURFACE MOUNT KIT VAL	4058075472952

EQUIPMENT / ACCESSORIES

- Accessories for several mounting options available
- Security rope for luminaire included
- Security brackets preinstalled
- External control gear included
- Suitable for use with separate Emergency Conversion Box
- Connector box with 5-pole terminal for through-wiring separately available for cable cross sections up to 2.5 mm^2

DOWNLOAD DATA

	Documents and certificates	Document name
PDF	User instruction / safety instructions	UI PL COMP 1200 V
PDF	Legal information	LISO Insert PL COMP 1200 V
PDF	Legal information	EM Insert PL COMP
PDF	Legal information	Informationstext 18 Abs 4 ElektroG
PDF	Declarations of conformity	CE Declaration of Conformity PL COMP V
PDF	Declarations of conformity UKCA	UKCA Declaration of Conformity PL COMP V
PDF	Certificates	PL COMP
PDF	EPD	EPD EN PANEL COMPACT DALI

	Photometric and lighting design files	Document name
IES	IES file (IES)	PL COMP 1200 V 35W 940 U19 EM CONVERSION BOX

© 2026, LEDVANCE GmbH. All rights reserved.

	Photometric and lighting design files	Document name
	LDT file (Eulumdat)	PL COMP 1200 V 35W 940 U19 EM CONVERSION BOX
	ULD file (DIALux)	PL COMP 1200 V 35W 940 U19
	ROLF file (RELUX)	PL COMP 1200 V 35W 940 U19
	UGR file (UGR table)	PL COMP 1200 V 35W 940 U19 EM CONVERSION BOX
	Light distribution curve type cone	PL COMP 1200 V 35W 940 U19 EM CONVERSION BOX
	Light distribution curve type polar	PL COMP 1200 V 35W 940 U19 EM CONVERSION BOX

	CAD/BIM files	Document name
	BIM Revit 3D	Panel Compact
	CAD STEP 3D	PL COMP 1200x300


	Tender texts	Document name
	Tender documents	PANEL COMPACT 1200 UGR19 CRI90 35W 940 U19-EN

LOGISTICAL DATA

Product code	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Gross weight	Volume
4099854017285	Folding box 1	1,260 mm x 39 mm x 304 mm	2279.00 g	14.94 dm^3
4099854017292	Shipping box 4	1,277 mm x 172 mm x 328 mm	10036.00 g	72.04 dm^3

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

ADDITIONAL CATALOG INFORMATION



References / Links

– For Guarantee see www.ledvance.com/guarantee

© 2026, LEDVANCE GmbH. All rights reserved.

DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.

© 2026, LEDVANCE GmbH. All rights reserved.