PRODUCT DATASHEET
LN INV D 1200 P 40W 940 DA EL WT

LINEAR INDIVILED DIRECT 1200 DALI EMERGENCY | Surface mounted luminaire for single or light line office application with CRI90, DALI-2 IoT technology and emergency battery, 1200 mm



Areas of application

- Emergency illumination of escape routes
- Buildings requiring up to 3 h emergency light operation
- Direct replacement for luminaires with fluorescent lamps
- Offices, education, public buildings
- Single and continuous line configuration
- Direct lighting

Product benefits

- Seamless integration of luminaires with emergency lighting function into general lighting
- Operation of integrated emergency lighting function with long life LiFePO4 battery with 3h battery discharge time
- Simple testing of luminaires with emergency lighting function thanks to integrated automatic test function
- Convenient visualization of results of automatic test with an included control LED
- Easy upgradeability of light source and driver (EVERLOOP design)
- Homogenous light distribution and reduced glare (UGR ≤ 19) thanks to IndiviLED® optics
- High performance with CRI90 and up to 130 lm/W
- Highly versatile due to selectable lumen steps (Multi Lumen) on the driver
- Symmetric light distribution for various application areas
- High color consistency with SDCM 3
- Multiple mounting options thanks to different accessories

Product features

- Certified according to European norms (EN 60598-2-22)
- Luminaire suitable for normal lighting and emergency lighting
- Emergency lighting function: battery discharge time of 3 h
- Function test of emergency lighting: automatic (AT)

© 2026, LEDVANCE GmbH. All rights reserved.

- Battery technology: LiFePO4
- Includes EVERLOOP: Convenient replacement of light source and LED driver
- Linkable into seamless light line with accessories (surface or pendant mounting)
- Pendant mounting with suspension kit (to be ordered separetely)
- 5-pole terminal block, cable cross section up to 5 x 2.5 mm^2
- Lifetime (L80/B10): 70,000 h (at 25 °C)

© 2026, LEDVANCE GmbH. All rights reserved.

TECHNICAL DATA


Electrical data

Nominal wattage	40 W / 34 W / 30 W / 25 W
Nominal voltage	220…240 V
Mains frequency	0/50/60 Hz
Nominal current	177…160…140…120 mA
Inrush current	9.92 A
Inrush current time T_{h50}	360 µs
Max. number of luminaires per miniature circuit breaker B16	20
Max. number of luminaires per miniature circuit breaker C10	20
Max. number of luminaires per miniature circuit breaker C16	32
Power factor λ	> 0.90
Maximum total harmonic distortion	≤ 20 %
Protection class	I
Surge capability (L-N)	1000 V
Surge capability (L/N-Ground)	2000 V
Operating mode	Integrated LED driver
Dimming interface	DALI-2 / IoT


Photometrical data

Luminous flux	5050 lm / 4450 lm / 3850 lm / 3250 lm
Luminous efficacy	126 lm/W / 131 lm/W / 128 lm/W / 130 lm/W
Color temperature	4000 K
Light color (designation)	Cool White
Color rendering index Ra	≥90
Standard deviation of color matching	3 sdcm
Low flicker	Yes
Flickering metric (Pst LM)	≤1
Stroboscope effect metric (SVM)	≤0.4
Photobiological safety group acc. to EN62778	RG1
Beam angle	90 °
UGR	< 19

© 2026, LEDVANCE GmbH. All rights reserved.

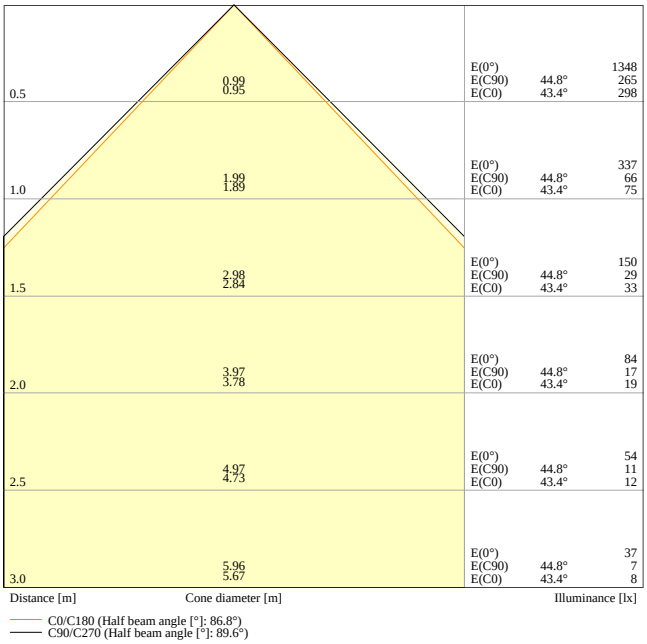

LN INV D 1200 P 40W 940 DAVR EM WT

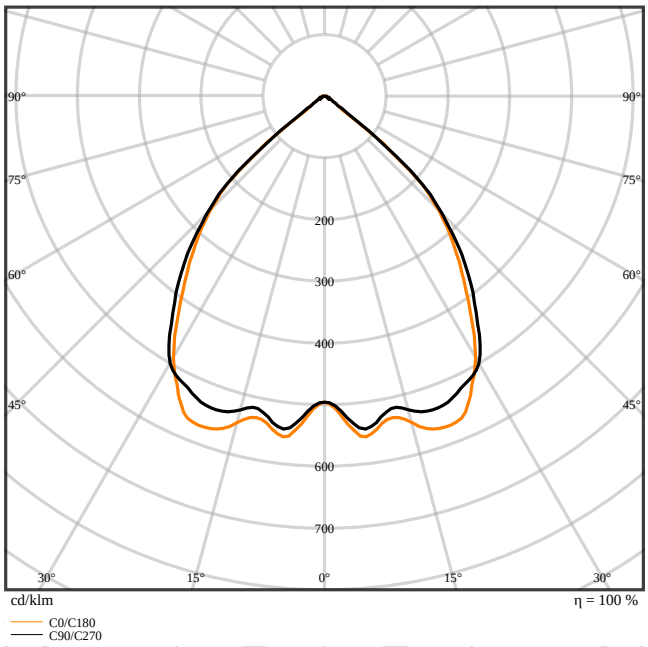

LN INV D 1200 P 40W 940 DAVR EM WT


Adjustable attributes

Nominal wattage	Color temperature	Luminous flux	Luminous efficacy
40 W	4000 K	5050 lm	126 lm/W
34 W	4000 K	4450 lm	131 lm/W
30 W	4000 K	3850 lm	128 lm/W
25 W	4000 K	3250 lm	130 lm/W

Dimensions & Weight

Length	1210.00 mm
Width	125.00 mm
Height	43.00 mm
Product weight	3500.00 g

© 2026, LEDVANCE GmbH. All rights reserved.



LN INV 1200 P

Materials & Colors

Product color	White
Housing color	White
RAL Color (most similar)	RAL 9003
Body material	Aluminum
Cover material	Polymethylmethacrylate (PMMA)
Light emitting surface material	Polymethylmethacrylate (PMMA)
Glow Wire Test according to IEC 60695-2-12	850 °C
Mercury content	0.0 mg

Application & Mounting

Ambient temperature range	0…+40 °C
Temperature range at storage	-25…+25 °C
Type of connection	Screwless terminal, 5-Pole (L, N, PE, DA+, DA-)
Type of protection	IP20
Protection class IK (shock resistance)	IK06
Dimmable	Yes
Type of dimming	DALI
IoT ready	Support of DALI data type PART 251, 252, 253 [1)]
Mounting type	Suspended/Surface
Mounting location	Ceiling
Application environment	Indoor
Mechanically adjustable	No
With light source	Yes
Replaceable light source	Yes

© 2026, LEDVANCE GmbH. All rights reserved.

1) Internet of Things. Supports data transfer via gateway to cloud-based monitoring platforms, such as LEDVANCE VIVARES Cloud

Lifespan

Lifespan L70/B50 at 25 °C	100000 h 1)
Lifespan L80/B10 at 25 °C	70000 h 1)
Lifespan L80/B50 at 25 °C	70000 h
Lifespan L90/B10 at 25 °C	35000 h 1)
Number of switching cycles	25000

1) t[h]: L70 / B50 @ 25 °C (Ta), t[h]: L80 / B10 @ 25 °C (Ta), t[h]: L90 / B10 @ 25 °C (Ta)

Control gear

Output current	800mA / 700mA / 600mA / 500 mA
Output ripple current (100 Hz)	≤ 5 %
Recommended control gear	OSRAM type OTI DALI 50/220-240/1A4 NFC L

BATTERY

Type of Battery	LiFePO4
Battery size [GMS]	Others
Nominal voltage of battery	3.2 V
Nominal capacity of battery	4500 mAh
Battery charging time	24 h

Emergency lighting

Type of Emergency Lighting (EL)	EL unit (battery and controller) for decentral operation included / EL certified driver (0Hz / DC operation) for central battery operation included
Area of emergency application	Anti-panic lighting / Escape route lighting
Type of emergency light operation	Non-maintained / Maintained
Type of emergency operation test	Automatic
Wattage in emergency operation mode	2.3 W
Luminous flux in emergency operation mode	440 lm
Battery life in emergency operation mode	3 h

Certificates & Standards

Standards	CE / CB / ENEC / TÜV SÜD / UKCA / EAC / EPD
Luminaire with limited surface temperature, "D sign"	No
Ball shot safe	No
Replaceable light source (EPREL)	Only by an expert

© 2026, LEDVANCE GmbH. All rights reserved.

Additional product data

Number of illuminants	1
Added function	EVERLOOP / VIVARES / Programmable Multi Lumen

Accessories Optional

Product image	Product name	EAN
	LN INV SUSPENSION KIT WT	4099854215537
	LN INV SUSPENSION WIRE	4099854323980
	LN INV 1200 THROUGHWIRING KIT	4099854214820
	LN INV INLINE CONNECTOR	4099854215612
	LN INV CORNER CONNECTOR WT	4099854308093
	LN INV INFILL 600 WT	4099854214882
	LN INV INFILL 1200 WT	4099854214868
	LN INV INFILL 1500 WT	4099854214844

EQUIPMENT / ACCESSORIES

- Suspension kit available for pendant luminaire version (to be ordered separately)
- Inline, corner and infill connectors available as separate accessory
- Through-wiring cable kit available

© 2026, LEDVANCE GmbH. All rights reserved.

Upgrade and replacement components

Components Light Source

Product image	Product name	EAN
	LISOEV 1074x29 50 40W 940 S90U19 GY	4099854284809

Components for light control

Components Light Control

Product image	Product name	EAN
	MANUAL CONTROL UNIT GROUP DALI-2 TW	4099854748691
	MANUAL CONTROL UNIT SELECT DALI-2	4058075837485
	MANUAL CONTROL UNIT SELECT DALI-2 TW	4058075837508
	MANUAL CONTROL UNIT SELECT DALI-2 EXCHANGEABLE COVER TW	4058075837522
	MANUAL CONTROL UNIT TOUCH DALI-2 TW	4058075837560
	MANUAL CONTROL UNIT TOUCH DALI-2	4058075837546
	PUSH CONTROL UNIT FLUSH MOUNT DALI-2 TW	4058075837584

© 2026, LEDVANCE GmbH. All rights reserved.

Product image	Product name	EAN
	PUSH CONTROL UNIT FM DALI-2 DIM	4099854846922
	SURFACE MOUNT FRAME	4058075843561
	PUSHBUTTON COUPLER DALI-2	4058075837607
	FLEX CONTROL UNIT IOT DALI-2 HCL TW	4058075841888
	FLEX CONTROL UNIT FLUSH MOUNT DALI-2 TW	4058075841901
	FLEX CONTROL UNIT DALI-2 TW	4058075843844
	FLEX CONTROL UNIT REAL-TIME-CLOCK DALI-2 HCL TW	4058075841925
	SENSOR DALI-2 LIGHT/PRESENCE-6 INFRARED CEILING INTEGRATION	4058075837621
	SENSOR CEILING MOUNTING KIT LIGHT/PRESENCE-6	4099854748714
	SENSOR DALI-2 LIGHT/PRESENCE-8 INFRARED CEILING INTEGRATION	4058075841949
	SENSOR DALI-2 LIGHT/PRESENCE-40X5 INFRARED CEILING INTEGRATION	4058075843868

© 2026, LEDVANCE GmbH. All rights reserved.

Product image	Product name	EAN
	SENSOR DALI-2 LIGHT/PRESENCE-24 INFRARED CEILING MOUNTING	4058075843882
	HIGHBAY SENSOR DALI-2 LIGHT/PRESENCE -21 INFRARED CEILING MOUNTING	4058075857537
	DALI sensors -8 IR CI, -40X5 IR CI, -24 IR CM, -21 IR CM	4058075843905
	RELAY DALI-2 RAIL MOUNTING	4099854709159
	RELAY DALI-2 CEILING MOUNTING	4099854709135
	REPEATER DALI-2 RAIL MOUNTING	4099854709111
	REPEATER DALI-2 CEILING MOUNTING	4099854709098

Safety advice

- All electrical connections must be made by a qualified person.
- Caution, risk of electric shock.
- Product in protection class I. All electrically conductive, metallic housing parts that can absorb voltage during operation or during maintenance in the event of a fault must be continuously connected to the protective earthing conductor.

DOWNLOAD DATA

	Documents and certificates	Document name
PDF	User instruction / safety instructions	LN INV D/DI 1200/1500 P DA EL
PDF	Legal information	Safety Insert G11205497
PDF	Legal information	Legal Insert G11235610

© 2026, LEDVANCE GmbH. All rights reserved.

	Documents and certificates	Document name
PDF	Legal information	Informationstext 18 Abs 4 ElektroG
PDF	Legal information	LN IND DALI EM
PDF	Declarations of conformity	CE declaration LN IND D P DA EL
PDF	Declarations of conformity UKCA	UKCA declaration LN INV D P DA EL
PDF	EU Data Act	DALI LED Driver and Luminaires

	Photometric and lighting design files	Document name
IES	IES file (IES)	LN INV D 1200 P 40W 940 DAVR EM WT
LDT	LDT file (Eulumdat)	LN INV D 1200 P 40W 940 DAVR EM WT
	UGR file (UGR table)	LN INV D 1200 P 40W 940 DAVR EM WT
	Light distribution curve type cone	LN INV D 1200 P 40W 940 DAVR EM WT
	Light distribution curve type polar	LN INV D 1200 P 40W 940 DAVR EM WT

	CAD/BIM files	Document name
STEP	CAD STEP 3D	LN INV D 1200 G2

	Tender texts	Document name
TXT	Tender documents	LINEAR INDIVILED DIRECT 1200 DALI EMERGENCY 1200 P 40W 940 DA EL WT-en


LOGISTICAL DATA

Product code	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Gross weight	Volume
4099854249402	Folding box 1	178 mm x 1,263 mm x 103 mm	4140.00 g	23.16 dm^3
4099854249419	Shipping box 2	1,297 mm x 197 mm x 224 mm	9680.00 g	57.23 dm^3

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

© 2026, LEDVANCE GmbH. All rights reserved.

ADDITIONAL CATALOG INFORMATION



LINEAR IndiviLED® DIRECT DALI	Driver	mA	W	lm	lm/W	
LN INV D 1200 P 40W 930 DA EL WT	OSRAM OTi DALI 50/ 220-240/1A4 NFC L	500	25	3100	124	✓
		600	30	3700	123	✓
		700	34	4250	125	✓
		800	40	4800	120	Preset
LN INV D 1200 P 40W 930 DA EL BK	OSRAM OTi DALI 50/ 220-240/1A4 NFC L	500	25	3000	120	✓
		600	30	3600	120	✓
		700	34	4100	122	✓
		800	40	4650	116	Preset
LN INV D 1200 P 40W 940 DA EL WT	OSRAM OTi DALI 50/ 220-240/1A4 NFC L	500	25	3250	130	✓
		600	30	3850	128	✓
		700	34	4450	131	✓
		800	40	5050	126	Preset
LN INV D 1200 P 40W 940 DA EL BK	OSRAM OTi DALI 50/ 220-240/1A4 NFC L	500	25	3150	126	✓
		600	30	3750	125	✓
		700	34	4300	126	✓
		800	40	4900	123	Preset


	BATTERY[6] [h]	TEST[7]	W	lm	MAINTAINED[8] / NON-MAINTAINED[9]
LINEAR INDIVILED® BK	LiFePO4 - 3h	automatic[10]	2.3	400	Maintained/Non-maintained
LINEAR INDIVILED® WT	LiFePO4 - 3h	automatic[10]	2.3	440	Maintained/Non-maintained

Testing Instructions[11]



Luminaire Status[13]	Control LED[12]
Normal[14]	Green[15]
Emergency[16]	OFF
Testing[17]	Green[15]; (1s, 1s, 1s ...) (0.1s, 0.1s, 0.1s ...)
Load failure[18]	Red[18]
Battery failure[20]	Red[18]; (1s, 1s, 1s ...)
Charging failure[21]	Red[18]; (0.1s, 0.1s, 0.1s ...)

Test[7]	
Initialization[22] ≥ 48 h Normal	Automatic[10]
Daily check of Control LED[23]	Green[15]
Monthly / Weekly functional test[24] (EN 50172) 30 s	Automatic test once every 7 days[25]
Yearly duration test[26] (EN 50172) [3h]	Automatic test once every 52 weeks[27]

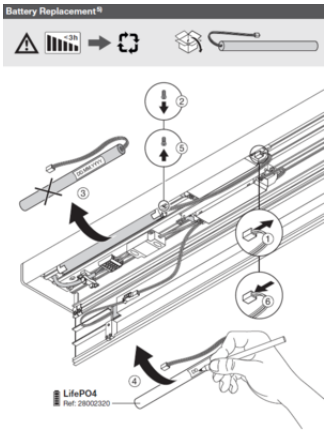

References / Links

- For Guarantee see www.ledvance.com/guarantee

DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.

© 2026, LEDVANCE GmbH. All rights reserved.