


SENSOR SURFACE FLAT LEADER FOLLOWER



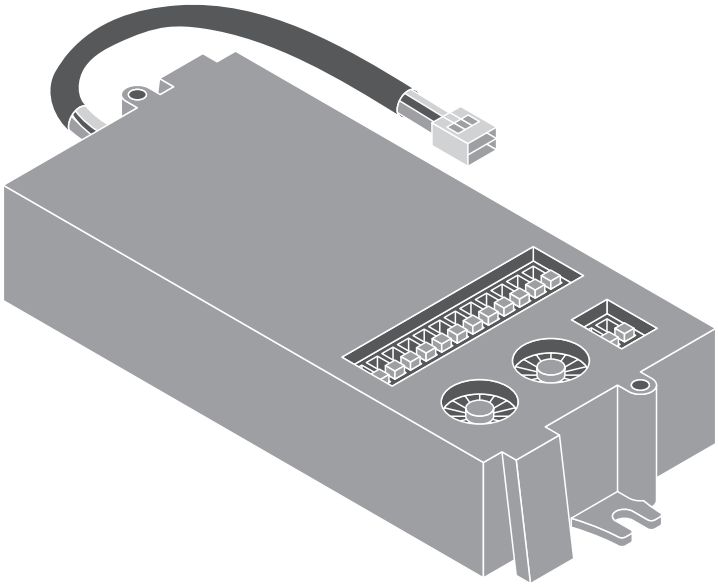









	EAN	l x w x h [mm]	VDC			IP	(°C)	
SEN SF FLAT LEADER FOLLOWER	4099854292897	90 x 39 x 35	12	2.4 GHz	5.8 GHz	20	-25...+60	0.03 kg


SENSOR LEADER FOLLOWER

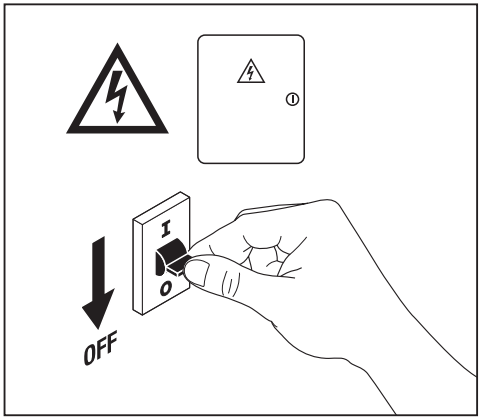


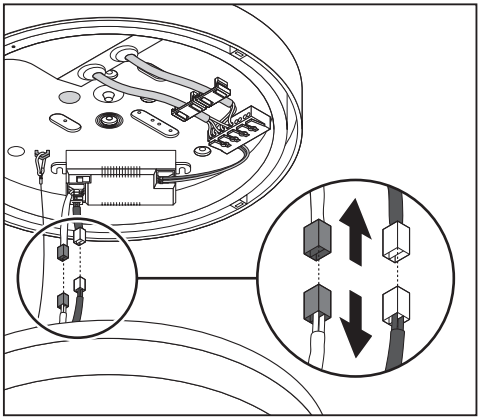

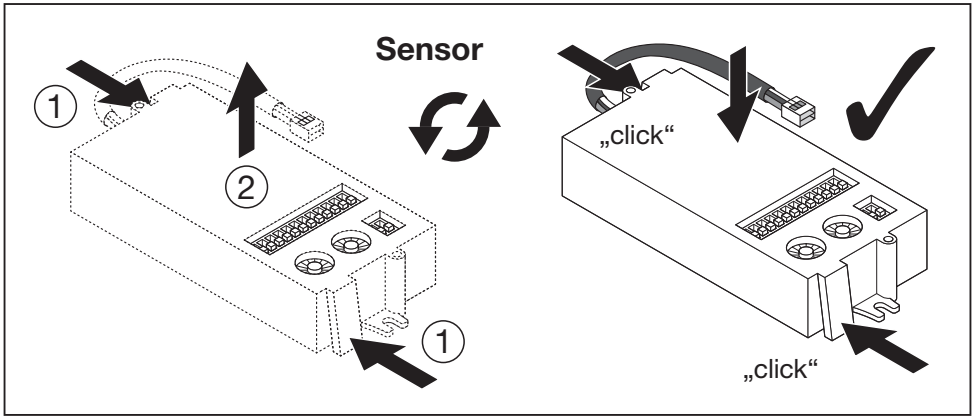

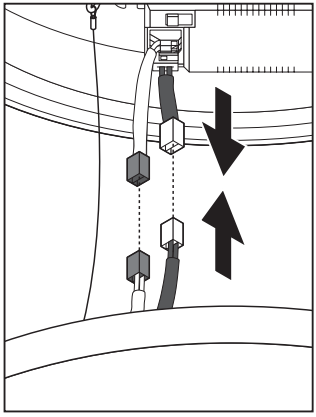


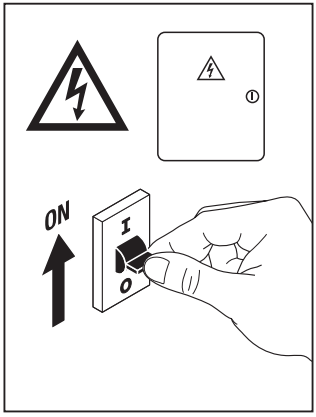


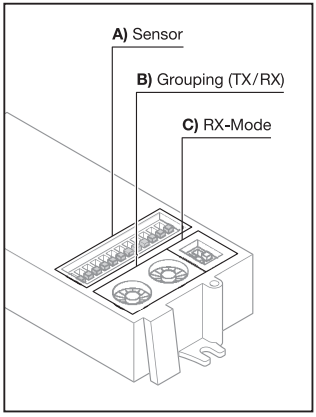

SENSOR LEADER FOLLOWER

A) Sensor

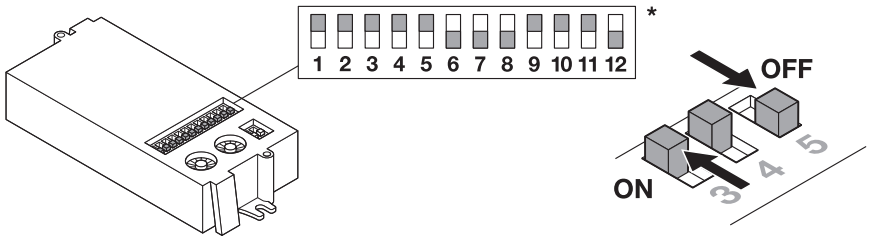



Detection Area

1	2	
ON	ON	**100%**
–	ON	75%
ON	–	50%
–	–	25%

Hold Time

3	4	5	
ON	ON	ON	**5s**
–	ON	ON	30s
ON	–	ON	1min
ON	ON	–	3min
–	ON	–	10min
–	–	–	20min

Daylight Sensor

6	7	8	
ON	ON	ON	15 LUX
–	ON	ON	30 LUX
ON	–	ON	50 LUX
ON	ON	–	100 LUX
–	ON	–	150 LUX
–	–	–	**Disable**

DIM Period

9	10	11	
ON	ON	ON	**0s**
–	ON	ON	30s
ON	–	ON	1min
ON	ON	–	3min
–	ON	–	10min
ON	–	–	30min
–	–	–	+∞


DIM Level **


12	
ON	50%
–	**20%**

*

Ⓓ Standardeinstellung ⒼⒷ Default setting Ⓕ Réglage par défaut Ⓘ Impostazione predefinita Ⓔ Ajuste por defecto Ⓟ Definição por defeito ⒼⓇ Προεπιλεγμένη ρύθμιση ⓃⓁ Standaardinstelling Ⓢ Standardinställning ⒻⒾⓃ Oletusasetus Ⓝ Standardinnstilling ⒹⓀ Standardindstilling ⒸⓏ Výchozí nastavení ⓇⓊⓈ Настройка по умолчанию Ⓗ Alapértelmezett beállítás ⓅⓁ Ustawienie domyślne ⓈⓀ Predvolené nastavenie ⓈⓁⓄ Privzeta nastavitev ⓉⓇ Varsayılan ayar ⒽⓇ Tvorničke postavke ⓇⓄ Setare implicită ⒷⒼ Настройка по подразбиране ⒺⓈⓉ Vaikimisi seade ⓁⓉ Numatytasis nustatymas ⓁⓋ Noklusējuma iestatījums ⓈⓇⒷ предефинисана подешавања ⓊⒶ Налаштування за замовчуванням ⓀⓏ әдепкі параметр


Detection Area

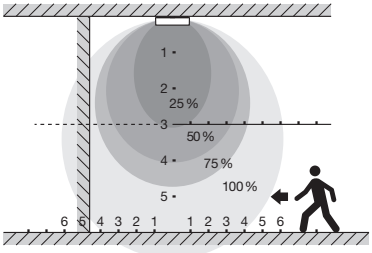


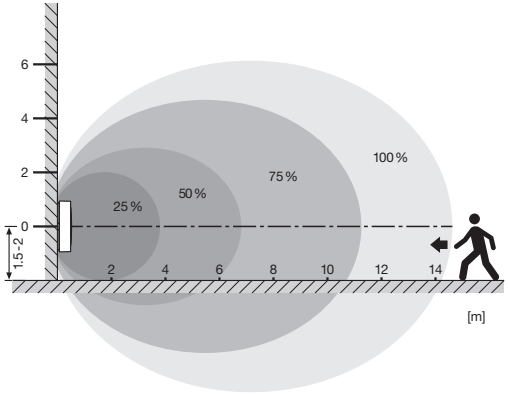

SENSOR LEADER FOLLOWER

B) Grouping

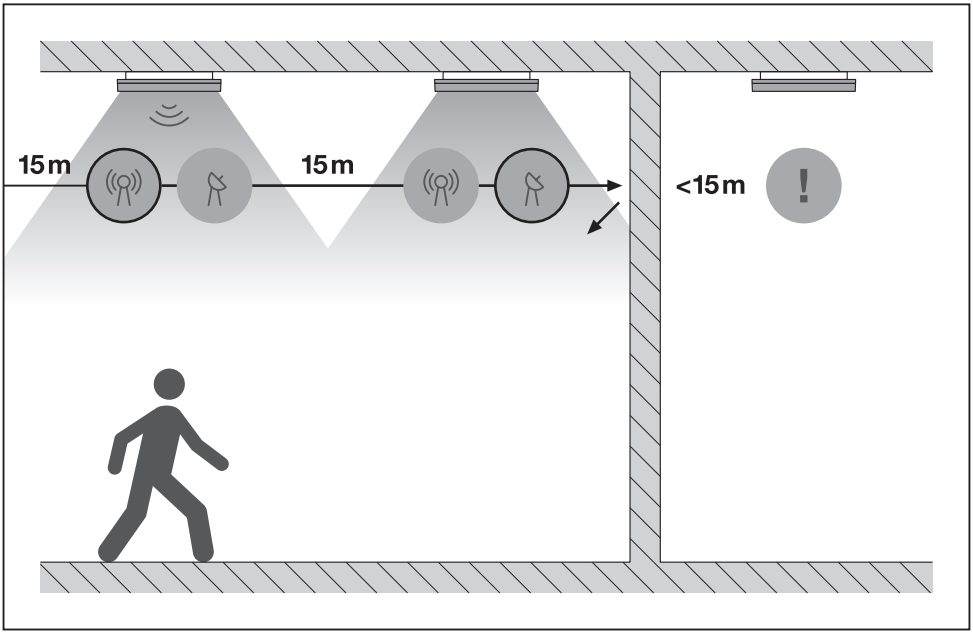

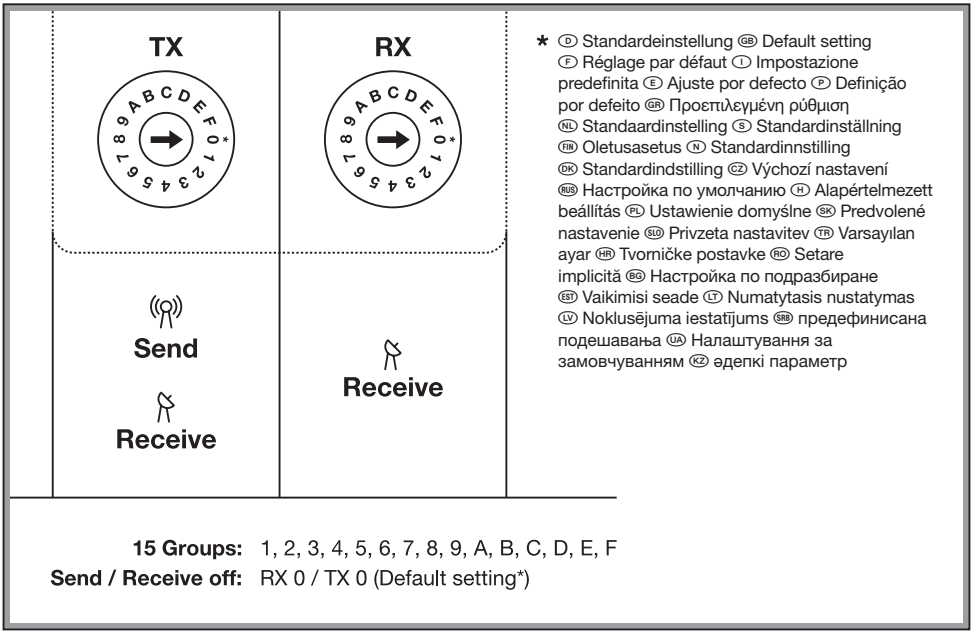


* (D) Standardeinstellung (GB) Default setting (F) Réglage par défaut (I) Impostazione predefinita (E) Ajuste por defecto (P) Definição por defeito (GR) Προεπιλεγμένη ρύθμιση (NL) Standaardinstelling (S) Standardinställning (FIN) Oletusasetus (N) Standardinnstilling (DK) Standardindstilling (CZ) Výchozí nastavení (RUS) Настройка по умолчанию (H) Alapértelmezett beállítás (PL) Ustawienie domyślne (SK) Predvolené nastavenie (SLO) Privzeta nastavitev (TR) Varsayılan ayar (HR) Tvorničke postavke (RO) Setare implicită (BG) Настройка по подразбиране (EST) Vaikimisi seade (LT) Numatytasis nustatymas (LV) Noklusējuma iestatījums (SRB) предефинисана подешавања (UA) Налаштування за замовчуванням (KZ) әдепкі параметр


15 Groups: 1, 2, 3, 4, 5, 6, 7, 8, 9, A, B, C, D, E, F

Send / Receive off: RX 0 / TX 0 (Default setting*)

SENSOR LEADER FOLLOWER


B1) Grouping Swarm

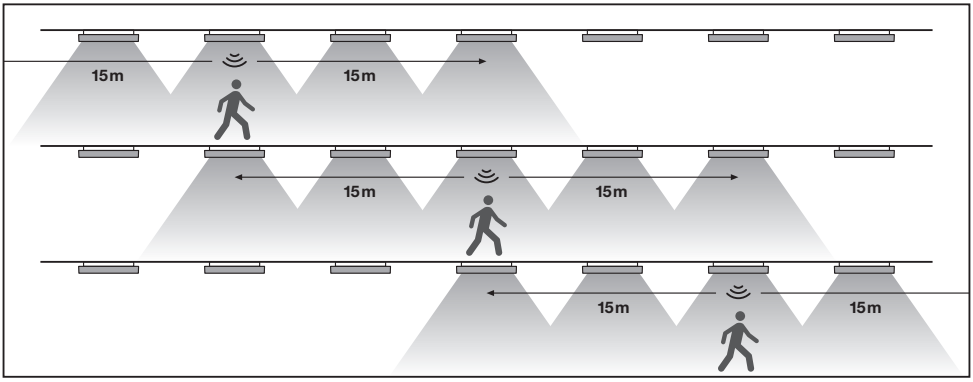

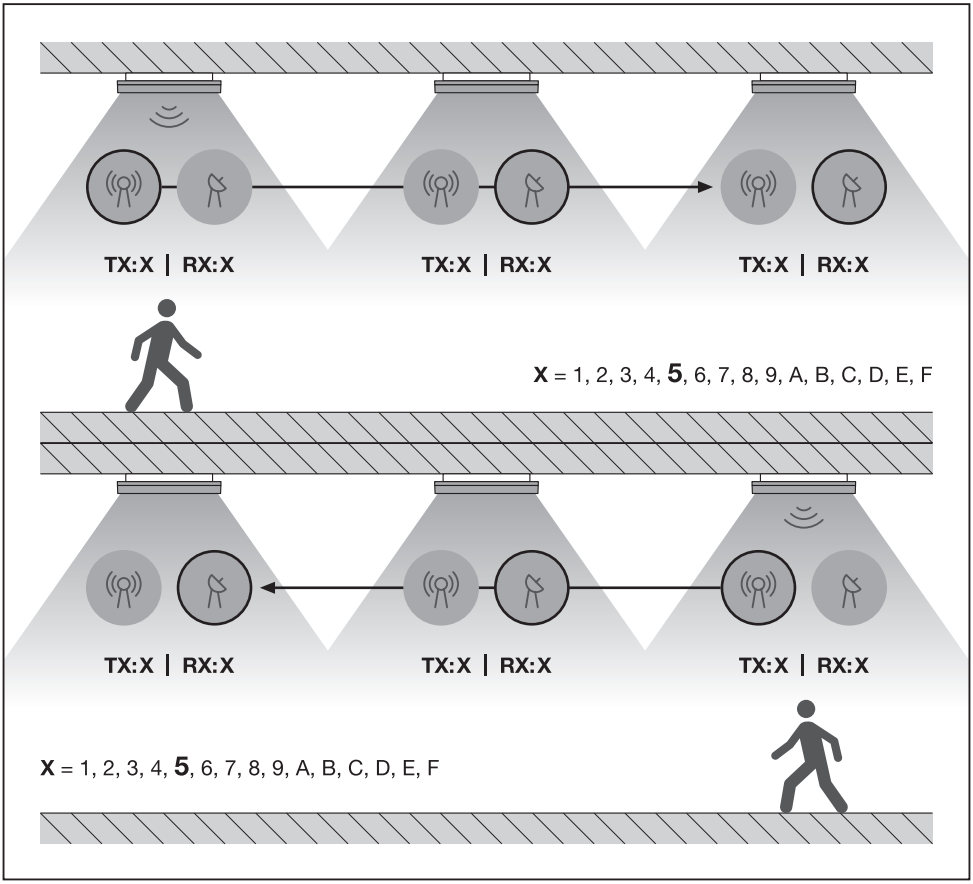


SENSOR LEADER FOLLOWER


B2) Grouping „Leader Follower“

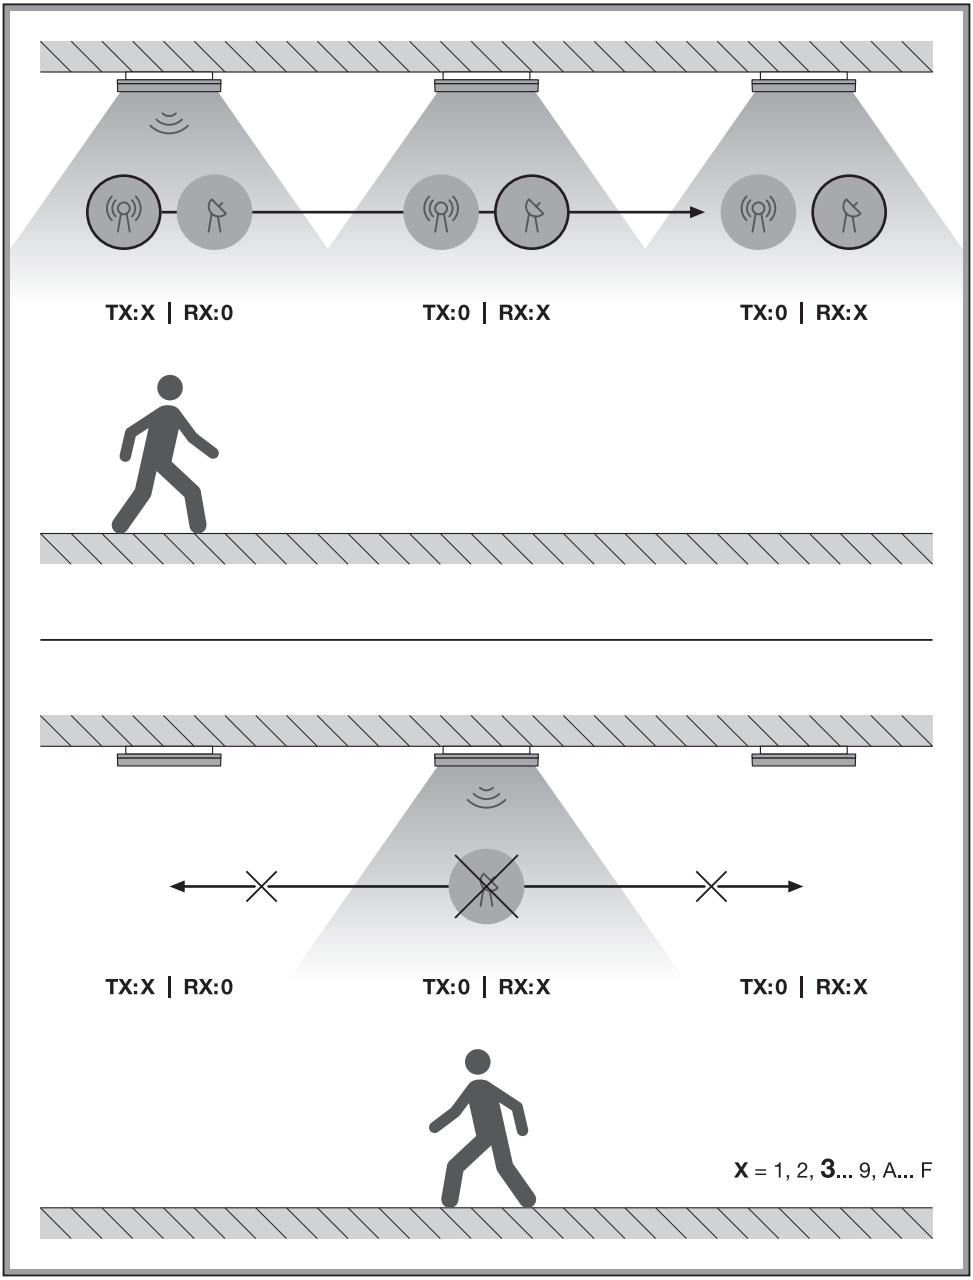


SENSOR LEADER FOLLOWER

C) RX-Mode

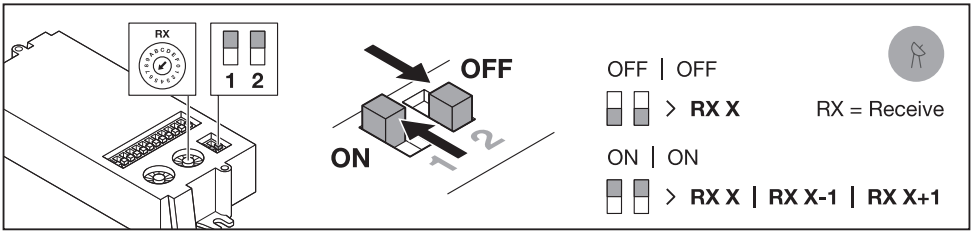

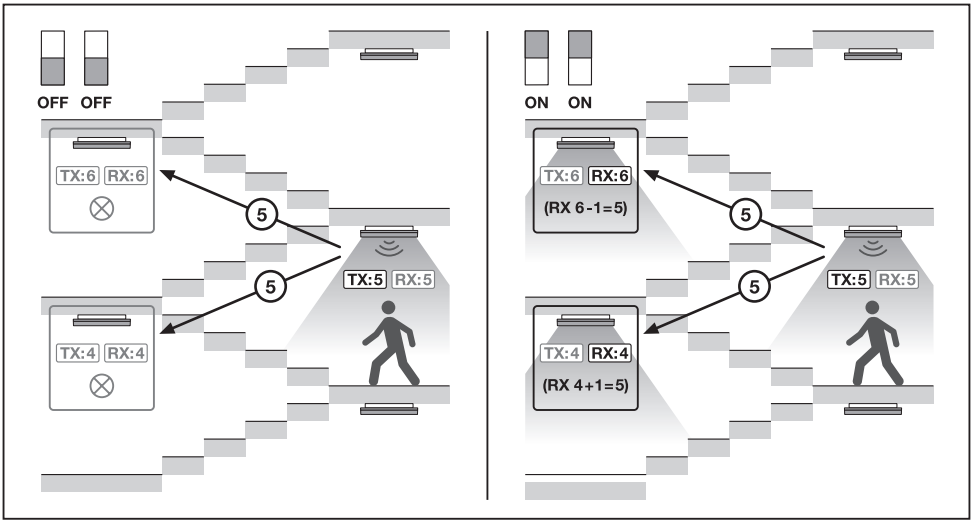

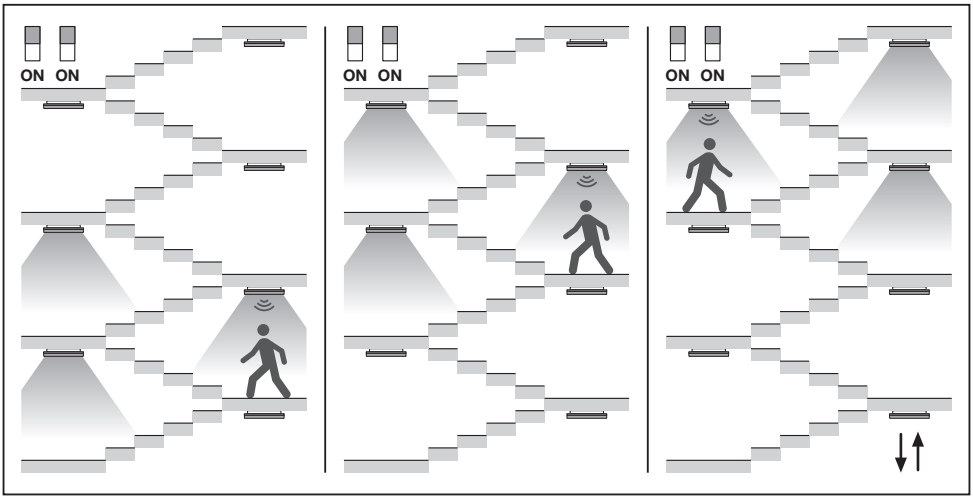

Floor TX / RX	RX Mode / Receive from			
	Regular		Optional	
	OFF | OFF	ON | ON	OFF | ON	ON | OFF
1	1	1 | 2	1 | 2	1
2	2	1 | 2 | 3	2 | 3	1 | 2
3	3	2 | 3 | 4	3 | 4	2 | 3
4	4	3 | 4 | 5	4 | 5	3 | 4
5	5	4 | 5 | 6	5 | 6	4 | 5
6	6	5 | 6 | 7	6 | 7	5 | 6
...	...	...	...	...
10 (A)	A	9 | A | B	A | B	9 | A
...	...	...	...	...
15 (F)	F	E | F	F	E | F

**

SF FLAT SEN 330	19 W						12 W					
	100 % W	100 % lm	50 % W	50 % lm	20 % W	20 % lm	100 % W	100 % lm	50 % W	50 % lm	20 % W	20 % lm
4000 K	19	2660	11	1380	5,5	550	12	1660	7	820	4	340
3000 K	19	2490	11	1320	5,5	540	12	1560	7	770	4	320

SF FLAT SEN 500	27 W						19 W					
	100 % W	100 % lm	50 % W	50 % lm	20 % W	20 % lm	100 % W	100 % lm	50 % W	50 % lm	20 % W	20 % lm
4000 K	27	3780	15	1950	7	770	19	2660	11	1380	5,5	580
3000 K	27	3600	15	1860	7	740	19	2530	11	1310	5,5	540





LEDVANCE SASU
CQM, 5 rue d'Altorf
67120 Molsheim France
www.ledvance.com

GB LEDVANCE Ltd, Sterling House,
810 Mandarin Court, Warrington,
Cheshire, WA1 1GG, United Kingdom

C10449058
G11302792
03.09.26