
PRODUCT DATASHEET
PL INV 600 DA P 38W ML 930 U19 BK

PANEL INDIVILED 600 DALI UGR<19 GEN 2 | Square recessed panel luminaires with Multi Select, DALI-2 IoT driver, EVERLOOP design and low glare, 600 x 600 mm

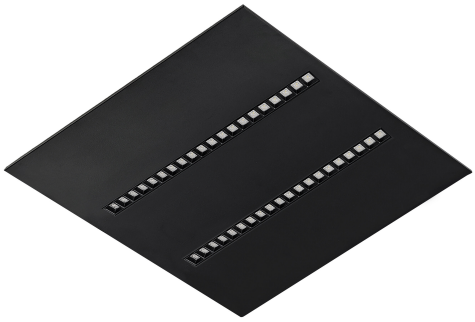

Areas of application

- Direct replacement for recessed luminaires with fluorescent lamps
- Offices, education, public buildings
- Conference rooms
- Suitable for recessed ceiling systems with grid size of 600 x 600 mm

Product benefits

- Easy upgradeability of light source and driver (EVERLOOP design)
- Homogenous light distribution and reduced glare (UGR ≤ 19) thanks to IndiviLED® optics
- High performance with CRI 90 and up to 140 lm/W
- Highly versatile due to selectable lumen levels (Multi Select)
- High color consistency with SDCM 3
- External driver for extended flexibility and easy installation
- Through-wiring possible with included connector box
- Multiple mounting options thanks to different accessories
- Suitable for central battery emergency installations acc. to EN 60598-2-22

Product features

- Low-carbon steel housing, available in white and black color
- Includes EVERLOOP: Convenient replacement of light source and LED driver
- IoT-ready luminaire with DALI-2 technology
- 5-pole terminal block, cable cross section up to 5 x 2.5 mm^2
- Lifetime (L80/B10): 70,000 h (at 25 °C)

© 2026, LEDVANCE GmbH. All rights reserved.

TECHNICAL DATA


Electrical data

Nominal wattage	38 W / 34 W / 29 W / 24 W
Nominal voltage	220…240 V
Mains frequency	0/50/60 Hz
Nominal current	170mA/145mA/125mA/105 mA
Inrush current	5.32 A
Inrush current time T_{h50}	34 µs
Max. number of luminaires per miniature circuit breaker B16	47
Max. number of luminaires per miniature circuit breaker C10	29
Max. number of luminaires per miniature circuit breaker C16	47
Power factor λ	> 0.9
Maximum total harmonic distortion	≤ 20 %
Protection class	II
Operating mode	External LED driver
Dimming interface	DALI-2 / IoT


Photometrical data

Luminous flux	4700 lm / 4250 lm / 3700 lm / 3100 lm
Luminous efficacy	124 lm/W / 125 lm/W / 128 lm/W / 129 lm/W
Color temperature	3000 K
Light color (designation)	Warm White
Color rendering index Ra	≥90
Standard deviation of color matching	≤3 sdcm
Low flicker	Yes
Flickering metric (Pst LM)	≤1
Stroboscope effect metric (SVM)	≤ 0.4
Photobiological safety group acc. to EN62778	RG1
Photobiological safety group acc. to EN62471	RG1
Beam angle	90 °
CIE Flux code	79 100 100 100 100
UGR	< 19

© 2026, LEDVANCE GmbH. All rights reserved.

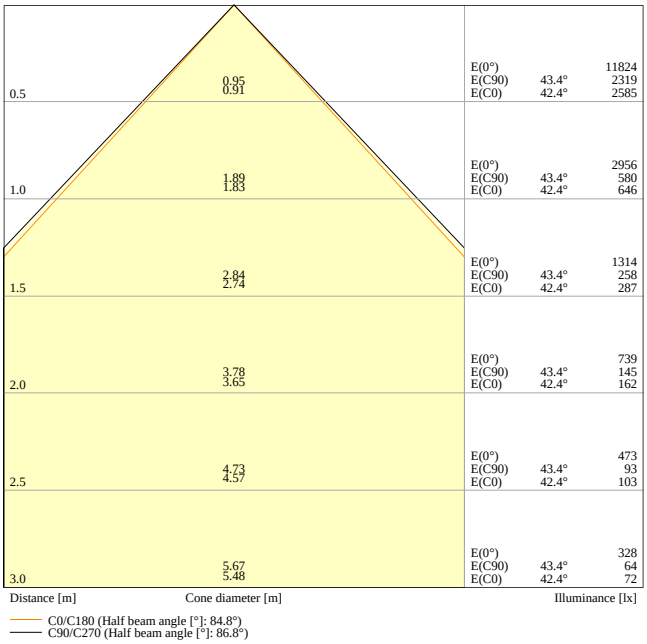

PL INV 600 DA P 38W ML 930 U19 BK

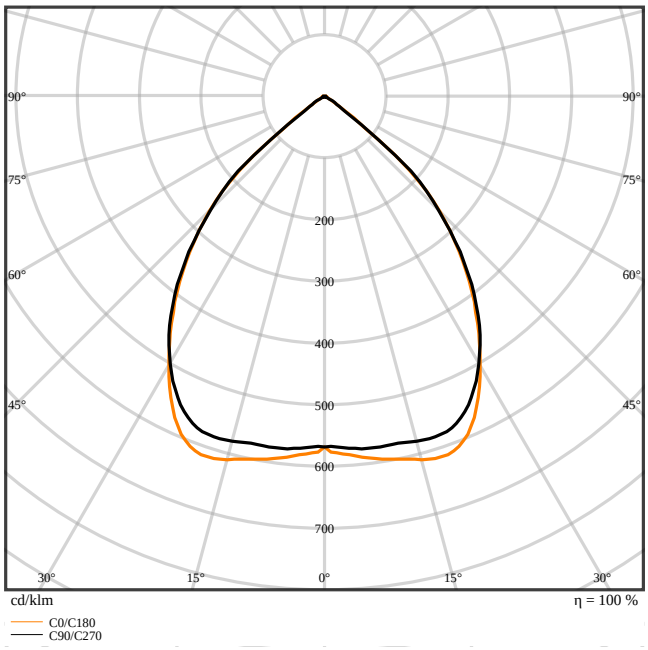

PL INV 600 DA P 38W ML 930 U19 BK


Adjustable attributes

Nominal wattage	Color temperature	Luminous flux	Luminous efficacy
38 W	3000 K	4700 lm	124 lm/W
34 W	3000 K	4250 lm	125 lm/W
29 W	3000 K	3700 lm	128 lm/W
24 W	3000 K	3100 lm	129 lm/W

Dimensions & Weight

Length	595.00 mm
Width	595.00 mm
Height	22.00 mm
Product weight	3400.00 g

© 2026, LEDVANCE GmbH. All rights reserved.



PL INV 600

Materials & Colors

Product color	Black
Housing color	Black
RAL Color (most similar)	RAL 9005
Body material	Steel
Cover material	Steel
Light emitting surface material	Polycarbonate (PC)
Glow Wire Test according to IEC 60695-2-12	650 °C
Mercury content	0.0 mg

Application & Mounting

Ambient temperature range	-20…+45 °C
Temperature range at storage	-20…+80 °C
Type of connection	Screwless terminal, 5-Pole (L, N, PE, DA+, DA-)
Type of protection	IP20
Protection class IK (shock resistance)	IK06
Dimmable	Yes
Type of dimming	DALI-2
IoT ready	Support of DALI data type PART 251, 252, 253 [1)]
Mounting type	Recessed/Suspended/Surface
Mounting location	Ceiling
Application environment	Indoor

© 2026, LEDVANCE GmbH. All rights reserved.

Mounting length	575 mm
Mounting width	575 mm
Mounting depth	50 mm
Mechanically adjustable	No
With light source	Yes
Replaceable light source	Yes

1) Internet of Things. Supports data transfer via gateway to cloud-based monitoring platforms, such as LEDVANCE VIVARES Cloud

Lifespan

Lifespan L70/B50 at 25 °C	100000 h 1)
Lifespan L80/B10 at 25 °C	70000 h 1)
Lifespan L80/B50 at 25 °C	70000 h
Lifespan L90/B10 at 25 °C	35000 h 1)
Number of switching cycles	50000

1) t[h]: L70 / B50 @ 25 °C (Ta), t[h]: L80 / B10 @ 25 °C (Ta), t[h]: L90 / B10 @ 25 °C (Ta)

Control gear

Output current	800mA / 700mA / 600mA / 500 mA
Output ripple current (100 Hz)	≤ 3 %
ECG - Length	164 mm
ECG - Width	45 mm
ECG - Height	25 mm
Recommended control gear	DR DALI-P-42/220-240/1A0

Emergency lighting

Type of Emergency Lighting (EL)	EL certified driver (0Hz / DC operation) for central battery operation included
Type of emergency operation test	None
Wattage in emergency operation mode	5.5 W
Luminous flux in emergency operation mode	840 lm

Certificates & Standards

Standards	CE / CB / ENEC / UKCA / EAC / EPD
Luminaire with limited surface temperature, "D sign"	No
Ball shot safe	No
EPD	LEDV-00079-V01.01-EN
Replaceable light source (EPREL)	Only by an expert

© 2026, LEDVANCE GmbH. All rights reserved.

Additional product data

Added function	EVERLOOP / MULTI LUMEN / VIVARES

Accessories Optional

Product image	Product name	EAN
	PANEL Suspension Kit	4058075402928
	PANEL 600 SURFACE MOUNT KIT H75 BK	4058075834330

EQUIPMENT / ACCESSORIES

- Accessories for several mounting options available
- Connector box with 5-pole terminal included
- Security rope for luminaire included
- External control gear included

Upgrade and replacement components

Components Light Source

Product image	Product name	EAN
	LISOEV 544X29 24 19W 930 S90U19 BK	4099854793752

Components for light control

Components Light Control

Product image	Product name	EAN
	MANUAL CONTROL UNIT GROUP DALI-2 TW	4099854748691
	MANUAL CONTROL UNIT SELECT DALI-2	4058075837485

© 2026, LEDVANCE GmbH. All rights reserved.

Product image	Product name	EAN
	MANUAL CONTROL UNIT SELECT DALI-2 TW	4058075837508
	MANUAL CONTROL UNIT SELECT DALI-2 EXCHANGEABLE COVER TW	4058075837522
	MANUAL CONTROL UNIT TOUCH DALI-2 TW	4058075837560
	MANUAL CONTROL UNIT TOUCH DALI-2	4058075837546
	PUSH CONTROL UNIT FLUSH MOUNT DALI-2 TW	4058075837584
	PUSH CONTROL UNIT FM DALI-2 DIM	4099854846922
	SURFACE MOUNT FRAME	4058075843561
	PUSHBUTTON COUPLER DALI-2	4058075837607
	FLEX CONTROL UNIT IOT DALI-2 HCL TW	4058075841888
	FLEX CONTROL UNIT FLUSH MOUNT DALI-2 TW	4058075841901
	FLEX CONTROL UNIT DALI-2 TW	4058075843844

© 2026, LEDVANCE GmbH. All rights reserved.

Product image	Product name	EAN
	FLEX CONTROL UNIT REAL-TIME-CLOCK DALI-2 HCL TW	4058075841925
	SENSOR DALI-2 LIGHT/PRESENCE-6 INFRARED CEILING INTEGRATION	4058075837621
	SENSOR CEILING MOUNTING KIT LIGHT/PRESENCE-6	4099854748714
	SENSOR DALI-2 LIGHT/PRESENCE-8 INFRARED CEILING INTEGRATION	4058075841949
	SENSOR DALI-2 LIGHT/PRESENCE-40X5 INFRARED CEILING INTEGRATION	4058075843868
	SENSOR DALI-2 LIGHT/PRESENCE-24 INFRARED CEILING MOUNTING	4058075843882
	HIGHBAY SENSOR DALI-2 LIGHT/PRESENCE -21 INFRARED CEILING MOUNTING	4058075857537
	DALI sensors -8 IR CI, -40X5 IR CI, -24 IR CM, -21 IR CM	4058075843905
	RELAY DALI-2 RAIL MOUNTING	4099854709159
	RELAY DALI-2 CEILING MOUNTING	4099854709135
	REPEATER DALI-2 RAIL MOUNTING	4099854709111

© 2026, LEDVANCE GmbH. All rights reserved.

Product image	Product name	EAN
	REPEATER DALI-2 CEILING MOUNTING	4099854709098

Safety advice

- All electrical connections must be made by a qualified person.
- Caution, risk of electric shock.
- The luminaires are not suitable for covering with thermally insulated material.
- The external flexible cable or cord of this luminaire cannot be replaced; if the cord is damaged, the luminaire must be disposed of.

DOWNLOAD DATA

	Documents and certificates	Document name
PDF	User instruction / safety instructions	G11286895 PANEL INDIVILED DALI
PDF	Addon technical information	Panel accessories compatibility overview
PDF	Legal information	Legal Insert G11258230
PDF	Legal information	Safety Insert G11207793
PDF	Legal information	Informationstext 18 Abs 4 ElektroG
PDF	Legal information	LSI_Insert_Panel_INV_DA
PDF	Legal information	Emergency Insert PANEL INDIVILED
PDF	Declarations of conformity	PANEL INDIVILED
PDF	Declarations of conformity UKCA	PANEL INDIVILED
PDF	Certificates	ENEC_PANEL INDIVILED
PDF	EPD	EPD EN PANEL INDIVILED DALI

	Photometric and lighting design files	Document name
IES	IES file (IES)	PL INV 600 DA P 38W ML 930 U19 BK

© 2026, LEDVANCE GmbH. All rights reserved.

	Photometric and lighting design files	Document name
	LDT file (Eulumdat)	PL INV 600 DA P 38W ML 930 U19 BK
	ULD file (DIALux)	PL INV 600 DA P 38W ML 930 U19 BK
	ROLF file (RELUX)	PL INV 600 DA P 38W ML 930 U19 BK
	UGR file (UGR table)	PL INV 600 DA P 38W ML 930 U19 BK
	Light distribution curve type cone	PL INV 600 DA P 38W ML 930 U19 BK
	Light distribution curve type polar	PL INV 600 DA P 38W ML 930 U19 BK

	CAD/BIM files	Document name
	BIM Revit 3D	Panel Indiviled G2
	CAD STEP 3D	PL INV 600 U19


	Tender texts	Document name
	Tender documents	PANEL INDIVILED 600 DALI UGR 19 GEN 2 38W ML 930 U19 BK-en


LOGISTICAL DATA


Product code	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Gross weight	Volume
4099854736247	Folding box 1	65 mm x 640 mm x 640 mm	3920.00 g	26.62 dm^3
4099854736254	Shipping box 2	655 mm x 145 mm x 660 mm	8880.00 g	62.68 dm^3

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

ADDITIONAL CATALOG INFORMATION







© 2026, LEDVANCE GmbH. All rights reserved.

References / Links

– For Guarantee see www.ledvance.com/guarantee

DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.

© 2026, LEDVANCE GmbH. All rights reserved.