
PRODUCT DATASHEET
LS AY P 14 SMB

CONNECTORS FOR RGBW LED STRIPS GEN 2 PERFORMANCE CLASS | Connectors for RGBW LED Strips

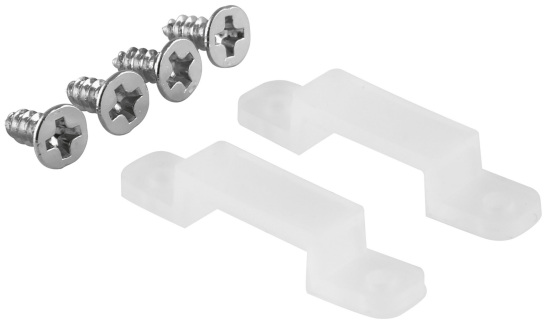

PERFOR-
MANCE
CLASS

Areas of application

- General indoor illumination

Product benefits

- Easy installation of connector, no manual wiring required
- Tool-free installation

© 2026, LEDVANCE GmbH. All rights reserved.

TECHNICAL DATA

Dimensions & Weight



Length	29.3 mm
Width	6.0 mm
Height	5.5 mm
Product weight	0.3 g

Colors & materials

Product color	White
Body material	Silicone

Temperatures & operating conditions

Ambient temperature range	-20…+55 °C
Temperature range in operation	-20…+55 °C
Permitted rel. humidity during operation	0…55 %

Certificates & Standards

Approval marks – approval	CE / UKCA / EAC
Standards	CE / UKCA
Type of protection	IP20

LOGISTICAL DATA

Temperature range at storage	-20…+80 °C

DOWNLOAD DATA

	Documents and certificates	Document name
PDF	Declarations of conformity	CE declaration - LS module
PDF	Declarations of conformity UKCA	UKCA declaration - LS module

© 2026, LEDVANCE GmbH. All rights reserved.

LOGISTICAL DATA

Product code	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Gross weight	Volume
4099854358937	BAG 2	100 mm x 75 mm x 6 mm	1.60 g	0.05 dm^3
4099854358944	Shipping box 50	120 mm x 100 mm x 120 mm	115.00 g	1.44 dm^3
4099854358951	Shipping box 500	525 mm x 270 mm x 140 mm	1600.00 g	19.85 dm^3

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.

© 2026, LEDVANCE GmbH. All rights reserved.