
PRODUCT DATASHEET
FL MAX CONNECTOR BOX

FLOODLIGHT MAX CONNECTOR BOX | Connector box enables separate installation of PSU and luminaire

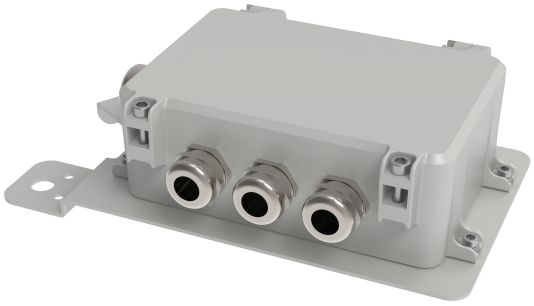

Areas of application

- Suitable for indoor and outdoor installations
- Ports/logistics: lights deep & wide areas, ideal with C5 corrosion protection

Product benefits

- For extreme temperatures: –40 °C to +50 °C (outdoors), up to +40 °C (indoors)
- Quick wiring: pre-fitted cable glands (IP66) enable safe, easy on-site connection
- Robust and weatherproof: IP66 / IK08, high C5 corrosion protection for harsh environments

Product features

- Connector box can be mounted directly to luminaire bracket
- Flexible driver unit; install up to 150 m away to lighten the mast.
- Climate membrane protects from water and lets air pass through

© 2026, LEDVANCE GmbH. All rights reserved.


TECHNICAL DATA

Electrical data

Protection class	I

Dimensions & Weight

Length	247.0 mm
Width	151.0 mm
Height	77.0 mm
Product weight	1100.00 g



FL MAX CONNECTOR BOX

Materials & Colors

Housing color	Gray
RAL Color (most similar)	RAL 9006

Application & Mounting

Ambient temperature range	-40…+50 °C
Type of protection	IP66
Corrosion resistance class acc. to EN 12944	C5
Replaceable light source	No

Certificates & Standards

Standards	CE / UKCA / EAC

Accessories Optional

Product image	Product name	EAN
	FL MAX CONNECTOR BOX	4099854696176

© 2026, LEDVANCE GmbH. All rights reserved.

EQUIPMENT / ACCESSORIES

- Cable glands included and preinstalled in the power supply
- One FL MAX CONNECTOR BOX is required per separately mounted luminaire head and power supply

DOWNLOAD DATA

	Documents and certificates	Document name
PDF	User instruction / safety instructions	FLOODLIGHT MAX GEN 2
PDF	Legal information	Safety Insert G11218828
PDF	Legal information	Legal Insert G11248547
PDF	Legal information	Informationstext 18 Abs 4 ElektroG
PDF	Declarations of conformity	FLOODLIGHT MAX GEN 2
PDF	Declarations of conformity UKCA	FLOODLIGHT MAX GEN 2

LOGISTICAL DATA

Product code	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Gross weight	Volume
4099854696176	Folding box 1	257 mm x 162 mm x 92 mm	1147.00 g	3.83 dm^3
4099854696183	Shipping box 5	487 mm x 282 mm x 199 mm	5845.00 g	27.33 dm^3

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.

© 2026, LEDVANCE GmbH. All rights reserved.