PRODUCT DATASHEET
LN INV DI 1500 P 69W 940 PS WT

LINEAR INDIVILED DIRECT/INDIRECT 1500 PS | Pendant luminaire for single or light line office application with CRI90 and Multi Lumen function, 1500 mm



Areas of application

- Direct replacement for luminaires with fluorescent lamps
- Offices, education, public buildings
- Single and continuous line configuration
- Direct and indirect lighting

Product benefits

- Easy upgradeability of light source and driver (EVERLOOP design)
- Homogenous light distribution and reduced glare (UGR ≤ 19) thanks to IndiviLED® optics
- Pendant luminaires with direct light emission (70%) and indirect light emission (30%)
- High performance with CRI90 and up to 134 lm/W
- Highly versatile due to selectable lumen steps (Multi Lumen) on the driver
- High color consistency with SDCM 3
- Easy installation
- Low flicker light thanks to special electronic control gear
- Multiple mounting options thanks to different accessories

Product features

- Minimalistic LEDVANCE SCALE design in extruded aluminum housing, available in white and black color
- Includes EVERLOOP: Convenient replacement of light source and LED driver
- Linkable into seamless light line with accessories (surface or pendant mounting)
- Pendant mounting with suspension kit (to be ordered separetely)
- Glow Wire Test according to IEC 60695-2-12: 850 °C
- 5-pole terminal block, cable cross section up to 5 x 2.5 mm^2



© 2026, LEDVANCE GmbH. All rights reserved.

– Lifetime (L80/B10): 70,000 h (at 25 °C)

© 2026, LEDVANCE GmbH. All rights reserved.

TECHNICAL DATA


Electrical data

Nominal wattage	69 W / 63 W / 61 W / 53 W
Nominal voltage	220…240 V
Mains frequency	50…60 Hz
Nominal current	315…285…270…242 mA
Inrush current	23.6 A
Inrush current time T_{h50}	176 µs
Max. number of luminaires per miniature circuit breaker B16	17
Max. number of luminaires per miniature circuit breaker C10	14
Max. number of luminaires per miniature circuit breaker C16	23
Power factor λ	> 0.90
Maximum total harmonic distortion	≤ 20 %
Protection class	I
Operating mode	Integrated LED driver


Photometrical data

Luminous flux	9050 lm / 8400 lm / 8200 lm / 7100 lm
Luminous efficacy	126 lm/W / 127 lm/W / 128 lm/W / 130 lm/W
Color temperature	4000 K
Light color (designation)	Cool White
Color rendering index Ra	≥90
Standard deviation of color matching	3 sdcm
Low flicker	Yes
Flickering metric (Pst LM)	≤1
Stroboscope effect metric (SVM)	≤0.4
Photobiological safety group acc. to EN62778	RG1
Photobiological safety group acc. to EN62471	RG0
Beam angle	90 ° + 130 °
UGR	< 19

© 2026, LEDVANCE GmbH. All rights reserved.

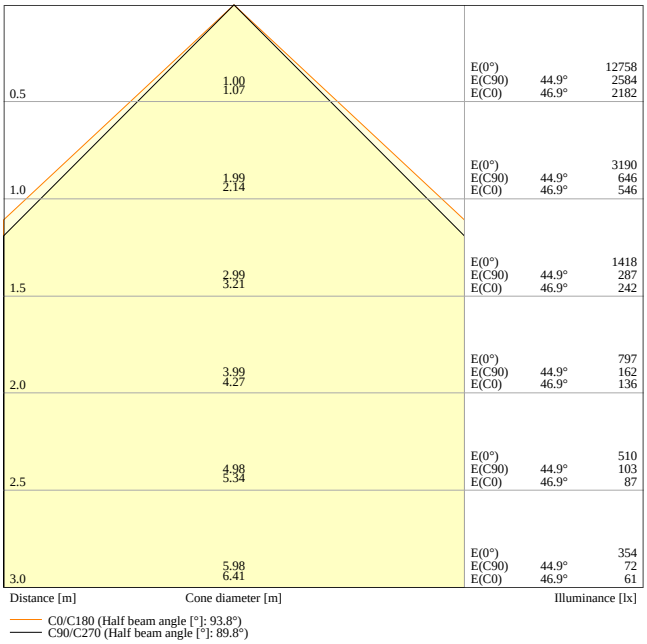

LN INV DI 1500 P 69W 940 PS WT 1400mA

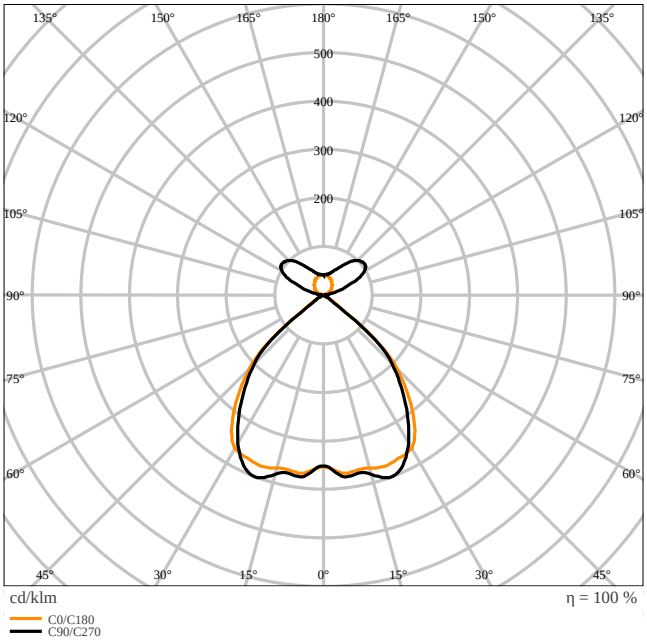

LN INV DI 1500 P 69W 940 PS BK


Adjustable attributes

Nominal wattage	Color temperature	Luminous flux	Luminous efficacy
69 W	4000 K	9050 lm	131 lm/W
63 W	4000 K	8400 lm	133 lm/W
61 W	4000 K	8200 lm	134 lm/W
53 W	4000 K	7100 lm	134 lm/W

Dimensions & Weight

Length	1475.00 mm
Width	125.00 mm
Height	43.00 mm
Product weight	4300.00 g

© 2026, LEDVANCE GmbH. All rights reserved.



LN INV 1500 P

Materials & Colors

Product color	White
Housing color	White
RAL Color (most similar)	RAL 9003
Body material	Aluminum
Cover material	Polymethylmethacrylate (PMMA)
Light emitting surface material	Polymethylmethacrylate (PMMA)
Glow Wire Test according to IEC 60695-2-12	850 °C
Mercury content	0.0 mg

Application & Mounting

Ambient temperature range	-20…+50 °C
Temperature range at storage	-20…+80 °C
Type of connection	Screwless terminal
Type of protection	IP20
Protection class IK (shock resistance)	IK06
Dimmable	No
Mounting type	Suspended
Mounting location	Ceiling
Application environment	Indoor
Mechanically adjustable	No
With light source	Yes
Replaceable light source	Yes

© 2026, LEDVANCE GmbH. All rights reserved.

Lifespan

Lifespan L70/B50 at 25 °C	100000 h [1)]
Lifespan L80/B10 at 25 °C	70000 h [1)]
Lifespan L80/B50 at 25 °C	70000 h
Lifespan L90/B10 at 25 °C	35000 h [1)]
Number of switching cycles	25000

1) t[h]: L70 / B50 @ 25 °C (Ta), t[h]: L80 / B10 @ 25 °C (Ta), t[h]: L90 / B10 @ 25 °C (Ta)

Control gear

Output current	1400mA / 1275mA / 1200mA / 1050 mA
Output ripple current (100 Hz)	≤ 5 %
Recommended control gear	OSRAM type OT FIT 55/220–240/1A0 CS L AP& IT FIT 18/220…240/350 CS L

Certificates & Standards

Standards	CE / CB / ENEC / TÜV SÜD / UKCA / EAC / EPD
Luminaire with limited surface temperature, "D sign"	No
Ball shot safe	No
EPD	LEDV-00026-V01.01-EN
Replaceable light source (EPREL)	Only by an expert

Additional product data

Number of illuminants	2
Added function	EVERLOOP / MULTI LUMEN

Required Accessories and Components

Product image	Product name	EAN
	LN INV SUSPENSION KIT WT	4099854215537
	LN INV SUSPENSION WIRE	4099854323980

Accessories Optional

© 2026, LEDVANCE GmbH. All rights reserved.

Product image	Product name	EAN
	LN INV 1500 THROUGHWIRING KIT	4099854214806
	LN INV INLINE CONNECTOR	4099854215612
	LN INV CORNER CONNECTOR WT	4099854308093
	LN INV INFILL 600 WT	4099854214882
	LN INV INFILL 1200 WT	4099854214868
	LN INV INFILL 1500 WT	4099854214844

EQUIPMENT / ACCESSORIES

- Suspension kit available for pendant luminaire version (to be ordered separately)
- Inline, corner and infill connectors available as separate accessory
- Through-wiring cable kit available

Upgrade and replacement components

Components Light Source

Product image	Product name	EAN
	LISOEV 1339x29 65 52W 940 S90U19 GY	4099854284854
	LISOEV 1465x31 25 17W 940 S130	4099854285028

© 2026, LEDVANCE GmbH. All rights reserved.

Components Driver

Product image	Product name	EAN
	OT FIT 55/220…240/1A0 CS L G2	4052899522558
	IT FIT 18/220-240/350 CS L	4062172212663

Safety advice

- All electrical connections must be made by a qualified person.
- Caution, risk of electric shock.
- Product in protection class I. All electrically conductive, metallic housing parts that can absorb voltage during operation or during maintenance in the event of a fault must be continuously connected to the protective earthing conductor.

DOWNLOAD DATA

	Documents and certificates	Document name
PDF	User instruction / safety instructions	LN INV
PDF	Legal information	Informationstext 18 Abs 4 ElektroG
PDF	Legal information	Safety Insert G11205497
PDF	Legal information	Legal Insert G11235609
PDF	Legal information	LN INV D DI
PDF	Declarations of conformity	LN INV
PDF	Declarations of conformity UKCA	LN INV
PDF	EPD	EPD EN LINEAR INDIVILED DIRECT INDIRECT

	Photometric and lighting design files	Document name
IES	IES file (IES)	LN INV DI 1500 P 69W 940 PS WT 1400mA

© 2026, LEDVANCE GmbH. All rights reserved.

	Photometric and lighting design files	Document name
	LDT file (Eulumdat)	LN INV DI 1500 P 69W 940 PS WT 1400mA
	ULD file (DIALux)	LN INV DI 1500 P 69W 940 PS WT
	ROLF file (RELUX)	LN INV DI 1500 P 69W 940 PS WT
	UGR file (UGR table)	LN INV DI 1500 P 69W 940 PS WT 1400mA
	Light distribution curve type cone	LN INV DI 1500 P 69W 940 PS WT 1400mA
	Light distribution curve type polar	LN INV DI 1500 P 69W 940 PS BK

	CAD/BIM files	Document name
	BIM Revit 3D	Linear Indiviled G2
	CAD STEP 3D	LN INV D I 1500 G2.

	Tender texts	Document name
	Tender documents	LINEAR INDIVILED DIRECTINDIRECT 1500 PS 1500 P 69W 940 PS WT-EN


LOGISTICAL DATA


Product code	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Gross weight	Volume
4099854135255	Folding box 1	1,252 mm x 167 mm x 87 mm	5000.00 g	18.19 dm^3
4099854135262	Shipping box 2	1,547 mm x 187 mm x 189 mm	11600.00 g	54.68 dm^3

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.


© 2026, LEDVANCE GmbH. All rights reserved.


ADDITIONAL CATALOG INFORMATION

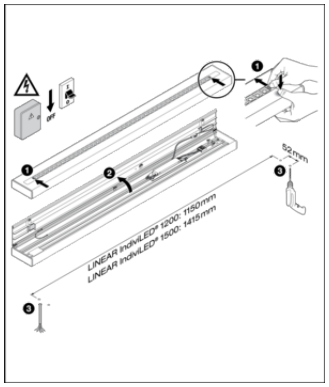









References / Links

– For Guarantee see www.ledvance.com/guarantee

DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.

© 2026, LEDVANCE GmbH. All rights reserved.