

SURFACE CIRCULAR
SURFACE CIRCULAR SENSOR

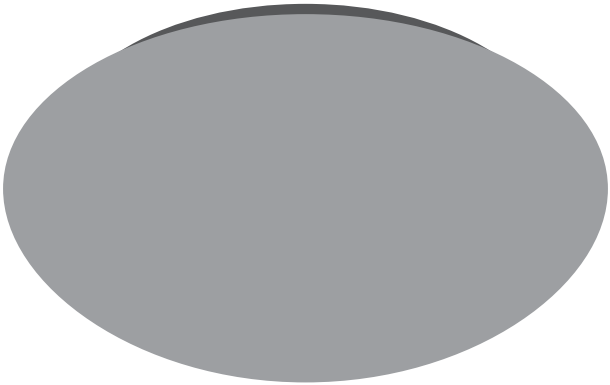



	EAN	Ø x h [mm]	W	V_{AC}	Hz	lm	lm/W	K
SF CIRC 250 SEN V 13W 830 IP44	4058075617902	250 x 91	13	220-240	50/60	920	70	3000
SF CIRC 250 SEN V 13W 840 IP44	4058075617926	250 x 91	13	220-240	50/60	960	75	4000
SF CIRC 250 V 13W 830 IP44	4058075617865	250 x 91	13	220-240	50/60	920	70	3000
SF CIRC 250 V 13W 840 IP44	4058075617889	250 x 91	13	220-240	50/60	960	75	4000
SF CIRC 350 SEN V 18W 830 IP44	4058075617988	350 x 115	18	220-240	50/60	1440	80	3000
SF CIRC 350 SEN V 18W 840 IP44	4058075618008	350 x 115	18	220-240	50/60	1440	80	4000
SF CIRC 350 V 18W 830 IP44	4058075617940	350 x 115	18	220-240	50/60	1440	80	3000
SF CIRC 350 V 18W 840 IP44	4058075617964	350 x 115	18	220-240	50/60	1440	80	4000
SF CIRC 400 SEN V 24W 830 IP44	4058075618084	400 x 120	24	220-240	50/60	1920	80	3000
SF CIRC 400 SEN V 24W 840 IP44	4058075618121	400 x 120	24	220-240	50/60	1920	80	4000
SF CIRC 400 V 24W 830 IP44	4058075618022	400 x 120	24	220-240	50/60	1920	80	3000
SF CIRC 400 V 24W 840 IP44	4058075618046	400 x 120	24	220-240	50/60	1920	80	4000

	EAN	IP	IK	▽	R_a	(°C)	PF	
SF CIRC 250 SEN V 13W 830 IP44	4058075617902	44	03	120°	> 80	-20...+40	> 0.5	0.4 kg
SF CIRC 250 SEN V 13W 840 IP44	4058075617926	44	03	120°	> 80	-20...+40	> 0.5	0.4 kg
SF CIRC 250 V 13W 830 IP44	4058075617865	44	03	120°	> 80	-20...+40	> 0.5	0.4 kg
SF CIRC 250 V 13W 840 IP44	4058075617889	44	03	120°	> 80	-20...+40	> 0.5	0.4 kg
SF CIRC 350 SEN V 18W 830 IP44	4058075617988	44	03	120°	> 80	-20...+40	> 0.5	0.6 kg
SF CIRC 350 SEN V 18W 840 IP44	4058075618008	44	03	120°	> 80	-20...+40	> 0.5	0.6 kg
SF CIRC 350 V 18W 830 IP44	4058075617940	44	03	120°	> 80	-20...+40	> 0.5	0.6 kg
SF CIRC 350 V 18W 840 IP44	4058075617964	44	03	120°	> 80	-20...+40	> 0.5	0.6 kg
SF CIRC 400 SEN V 24W 830 IP44	4058075618084	44	03	120°	> 80	-20...+40	> 0.5	0.8 kg
SF CIRC 400 SEN V 24W 840 IP44	4058075618121	44	03	120°	> 80	-20...+40	> 0.5	0.8 kg
SF CIRC 400 V 24W 830 IP44	4058075618022	44	03	120°	> 80	-20...+40	> 0.5	0.8 kg
SF CIRC 400 V 24W 840 IP44	4058075618046	44	03	120°	> 80	-20...+40	> 0.5	0.8 kg


SURFACE CIRCULAR
SURFACE CIRCULAR SENSOR








IP44

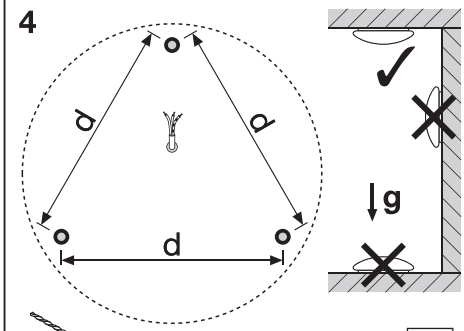


3x

[mm]	d
SURFACE CIRCULAR 250	157
SURFACE CIRCULAR 350	223
SURFACE CIRCULAR 400	266

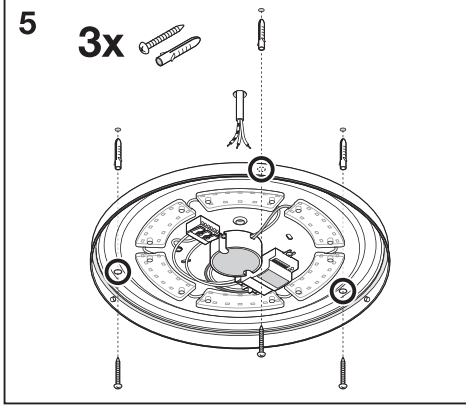


IP20

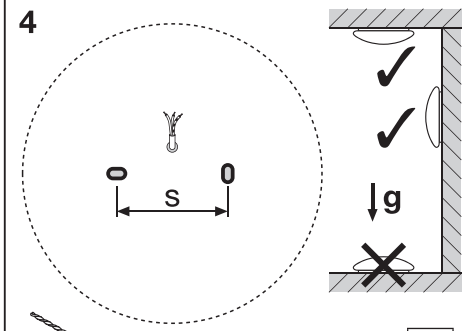


2x


[mm]	s
SURFACE CIRCULAR 250	110
SURFACE CIRCULAR 350	95
SURFACE CIRCULAR 400	130

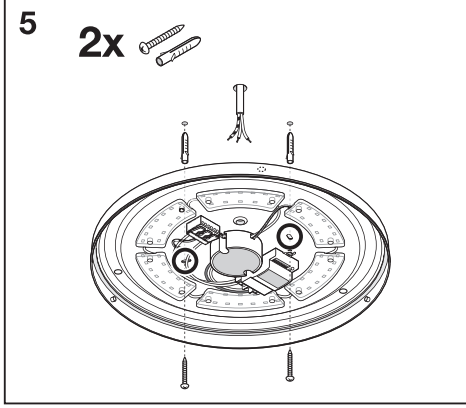


SURFACE CIRCULAR
SURFACE CIRCULAR SENSOR


6




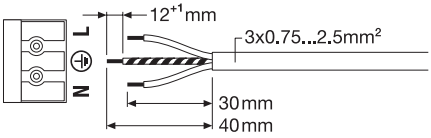

7: SURFACE CIRCULAR SENSOR

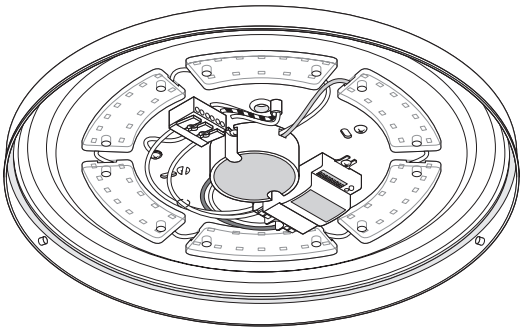

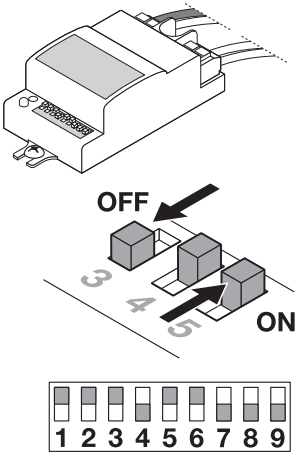



Detection Area

1	2	3	
ON	ON	ON	100 %
–	ON	ON	75 %
ON	–	ON	50 %
–	–	ON	25 %
–	–	–	10 %




Hold Time


4	5	6	
ON	ON	ON	5 s
–	ON	ON	30 s
ON	–	ON	90 s
–	–	ON	3 min
ON	ON	–	20 min
–	–	–	30 min





Daylight Sensor

7	8	9	
ON	ON	ON	2 LUX
ON	ON	–	10 LUX
–	ON	–	25 LUX
ON	–	–	50 LUX
–	–	–	Disable

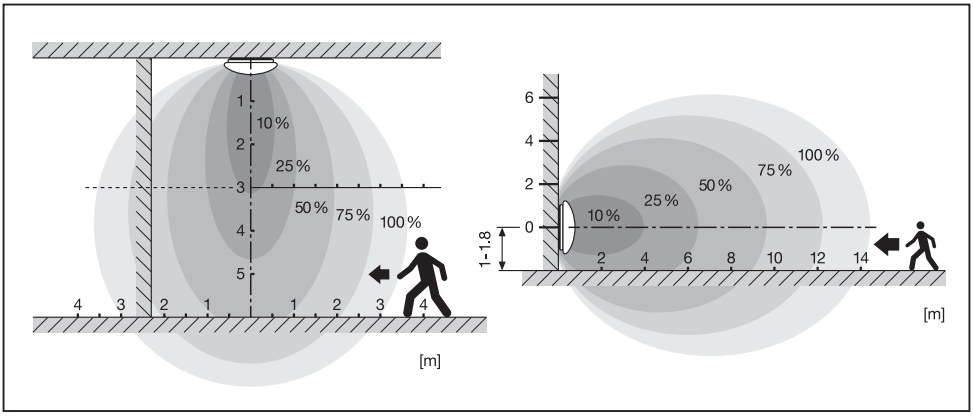

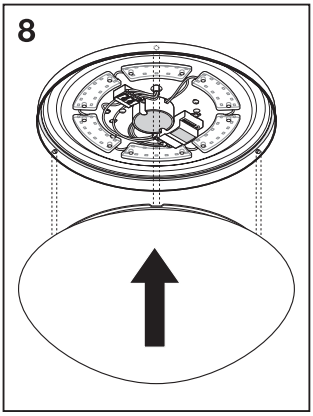

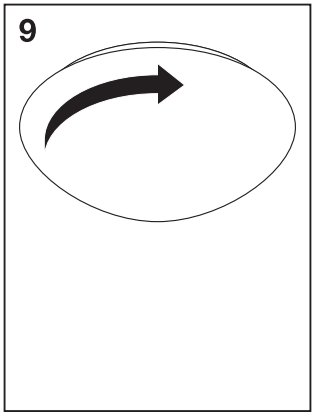

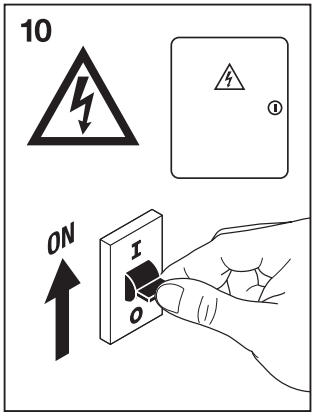

	EAN	Ø x h [mm]
SF CIRCULAR 250 COVER	4058075156722	250 x 80
SF CIRCULAR 350 COVER	4058075156807	350 x 104
SF CIRCULAR 400 COVER	4058075156821	400 x 112

RECICLA
Al Azul

22
PAP
Raccolta Carta
Verifica le disposizioni del tuo comune.

LED

230V

FR
Cet appareil se recycle
À DÉPOSER EN MAGASIN
OU
À DÉPOSER EN DÉCHÈTERIE
Points de collecte sur www.quefairedemesdechets.fr

LEDVANCE SASU
CQM, 5 rue d'Altorf
67120 Molsheim France
www.ledvance.com

GB LEDVANCE Ltd, Sterling House,
810 Mandarin Court, Warrington,
Cheshire, WA1 1GG, United Kingdom

C10449057
G11302657
14.09.26